BDS®
BERDIS
LIGHTING

CABINET LIGHT SERIES

LED: OSRAM CREE

PRODUCTS PROMOTION

Installation height 8mm

UNBELIEVABLE

Lighting Council AUSTRALIA MEMBER

ENABLED Member EnabLED Licensing Program for LED Luminaires and Retrofit Bulbs

RA ≥90 | 110V 230V | 12V 24V | SAA | FC | CE | IC | IC-F | 5Y Warranty

www.berdisled.com

BDS®
BERDIS
LIGHTING

SUPER-MINI indoor spotlight

1-1 B1101-07/1
Size: Ø22*8
Cut-out: Ø16

1-2 B1101-07/2
Size: Ø25*8
Cut-out: Ø20

1-3 B1101-07/1
Size: Ø30*9
Cut-out: Ø25

2 B1101-02/3
Size: Ø34*12
Cut-out: Ø28

3 B1101-02/4
Size: Ø34*22
Cut-out: Ø28

4-1 B1101-02/2
Size: Ø45*23
Cut-out: Ø35

4-2 B1101-02/1
Size: Ø45*23
Cut-out: Ø35

5-1 B0116-01/1A
Cut-out:Ø35
Size: Ø42*23

5-2 B0116-01/1B
Cut-out:Ø42
Size: Ø42*40

6-1 B1101-01/1
Cut-out:Ø28

6-2 B1101-01/2
Cut-out:Ø35

7-1 B1101-01/1
Cut-out:Ø28

7-2 B1101-01/2
Cut-out:Ø35

7-3 B1101-01/2
Cut-out:Ø35

Contact
BERDIS LIGHTING (JIANG MEN) CO., LTD.
RoRo Email: sales2@berdisled.com
Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

BDS®
BERDIS
LIGHTING



SUPER-MINI indoor spotlight

1-1

B1101-07/1
Size: Ø22*8
Cut-out: Ø16



Cut-out:Ø16

1-2

B1101-07/2
Size: Ø25*8
Cut-out: Ø20



Cut-out:Ø20

1-3

B1101-07/1
Size: Ø30*9
Cut-out: Ø25



Cut-out:Ø25





- IP Rating: 20
- Optics:Lens
- Material : Aluminum
  Stainless-Steel 304/316
- Voltage: 12V/24V 200~ 240V
- Color:Silver,White, gray, black, nickel-brushed, chrome

LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Material
B0110-07/1	0.5W	Ø16	Ø22*8	90	15°/20°/25°/38° 60°/20*40°/90°	Aluminum
B0110-07/2	0.5W	Ø20	Ø25*8	90		Aluminum
B0110-07/3	0.5W/1W	Ø25	Ø30*9	90		Aluminum

BERDIS LIGHTING

SUPER-MINI indoor spotlight

2

B0110-02/3
Installation height 12mm

28mm IP54

Surface mounting housing

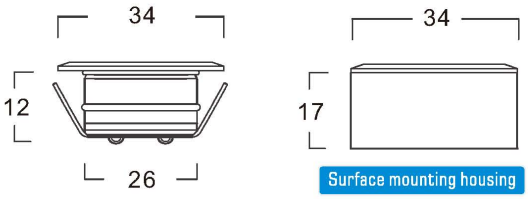

- IP Rating: 54
- Optics:Diffuser
- Material : Aluminum
  Stainless-Steel 304/316
- Voltage: 12V/24V 200~ 240V
- Color:Silver,White, gray, black, nickel-brushed, chrome

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Material
B0110-02/3	1W	Ø28	Ø34*12	90	120°	Aluminum

BDS®
BERDIS
LIGHTING

SUPER-MINI indoor spotlight

3 B1101-05/A
Ultra thin flat

28mm IP54

Surface mounting housing

Surface mounting housing



B0110-02/4



B0202-03-1/A

- IP Rating: 54
- Optics:Lens,Reflector
- Material : Aluminum
  Stainless-Steel 304/316
- Voltage: 12V/24V 200~ 240V
- Color:Silver,White, gray, black, nickel-brushed, chrome

LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Material
B0110-02/4	1W/3W	Ø28	Ø34*22	90	10°/25°/30°/40° 60°/80°/25*45°	Aluminum

BDS®
BERDIS
LIGHTING

SUPER-MINI indoor spotlight

4 B1101-02
Ultra thin flat

38mm IP54

38mm

Surface mounting housing





B0202-03-1/B

- IP Rating: 54
- Optics:Lens,Reflector
- CCT OPTION
- Assemble height 23MM
- Material : Aluminum
  Stainless-Steel 304/316
- Voltage: 12V/24V 200~ 240V
- Color:Silver,White, gray, black, nickel-brushed, chrome

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1101-02/1	1~3W	Ø38	Φ45*23mm	90	15°/24°/36°/60°	85lm/w	12V/24V 110V/230V
B1101-02/2	1~3W	Ø38	Φ45*23mm	90		85lm/w	12V/24V 110V/230V

BDS®
BERDIS
LIGHTING

5-1

B0116-01/A1

Normal standard



5-2

B0116-01/A1

Anti-glare standard



- IP Rating: 54
- Optics:Lens,Reflector
- CCT OPTION
- Assemble height 22MM
- Material : Aluminum
  Stainless-Steel 304/316
- Voltage: 12V/24V 200~ 240V
- Color:Silver,White, gray, black, nickel-brushed, chrome

IP54 35mm

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B0116-01/A1	3W	Ø35	Φ42*22mm	90	10°/25°/30°/40° 60°/80°/25*45°	80lm/w	12V/24V 110V/230V
B0116-01/A2	3W	Ø35	Φ42*40mm	90		80lm/w	12V/24V 110V/230V

BDS®
BERDIS
LIGHTING

6-1 B0111-01/A
Normal standard



6-2 B0111-01/B
Anti-glare standard





- IP Rating: 54
- Optics:Lens,Reflector
- CCT OPTION
- Material : Aluminum
  Stainless-Steel 304/316
- Voltage: 12V/24V 200~ 240V
- Color:Silver,White, gray, black, nickel-brushed, chrome

28mm IP54

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B0111-01/A	3W	Ø35	Φ35*30mm	90	15°/25°/30°	80lm/w	12V/24V 110V/230V
B0111-01/B	3W	Ø35	Φ35*42mm	90	40°/60°/80°/100°	80lm/w	12V/24V 110V/230V

BDS®
BERDIS
LIGHTING

SUPER-MINI indoor spotlight

7-1 B0111-02/A
Normal standard



7-2 B0111-02/B
Anti-glare standard





7-3 B0111-02/G-5W
Anti-glare standard



IP54 35mm

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B0111-02/A	3W	Ø35	Φ42*32mm	90	15°/24° 38°/50°/90°	80lm/w	12V/24V 110V/230V
B0111-02/B	3W	Ø35	Φ42*42mm	90		80lm/w	12V/24V 110V/230V
B0111-02/G	5W	Ø35	Φ42*60mm	90		80lm/w	12V/24V 110V/230V

BERDIS LIGHTING

Multiple voltage control schemes

1

One-To-One External constant current Trailing edge Dimmable driver

- Power : 3W
- PF 0.9
- 5 Years warranty

Single CCT Solution

CCT Solution

2

One-To-Six External constant current Trailing edge Dimmable driver

- Power : 6*3W
- PF 0.9
- 5 Years warranty

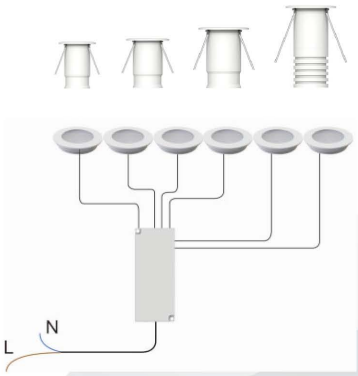

Connect to 110V or 230V

ONE-TO-SIX DRIVER

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

BDS®
BERDIS
LIGHTING

Multiple voltage control schemes

4

DC10-30V wide range voltage solution

- Power : 1W/3W
- 5 Years warranty

Connect to DC10~30V
Connect to battery

5

Connect to 12V or 24V Transformer
Connect to DMX512 Transformer

6

Trailing edge Dimmable driver

Power : 1W/3W
12V DC/24V DC

7

2.4G Smart Control Dimming

- Power : 36*1W/12*3W
- PF : 0.9
- 5 Years warranty
- Remote control
- Brightness Adjust
- Night Light
- 15M,30M,1H Timming Setting
- One driver connect to 36pcs 1W or 12pcs 3W Max. spots

Contact
BERDIS LIGHTING (JIANG MEN) CO., LTD.
RoRo Email: sales2@berdisled.com
Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China