

PRODUCTS PROMOTION

DIY Mark Light




LED : **OSRAM** **CREE**



REPLACEABLE VERSION

Freely match with different color/type frames.

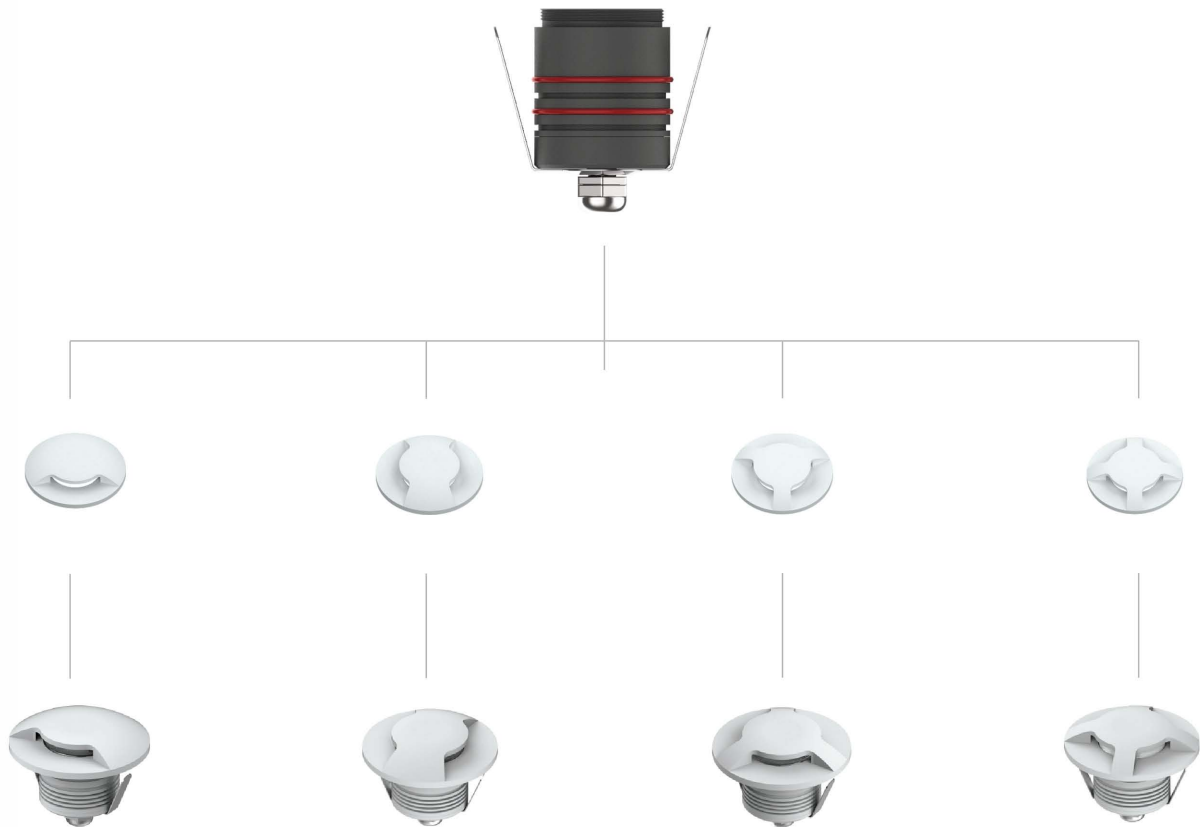

- DIY
- Save stock
- Match flexibly
- Frame can be replaced by yourself
- Color: White, Silver, Black, Antracit

Appearance Options



Freely match with different color/type frames

1

B1302-03/1 Ø23
B1302-04/1 Ø38



2

B1302-03/2 Ø23
B1302-04/2 Ø38



3

B1302-03/3 Ø23
B1302-04/3 Ø38



4

B1302-03/4 Ø23
B1302-04/4 Ø38



Delivery standard

- Heat sink and frame deliver dividually, free to DIY.
- Heat sink and frame assembled together , not possible to diassemble.
- Can be used for indoor and outdoor



Assemble box

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.


RoRo Email: sales2@berdisled.com

Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China


www.berdisled.com

SUPER-MINI outdoor *mark light*

1

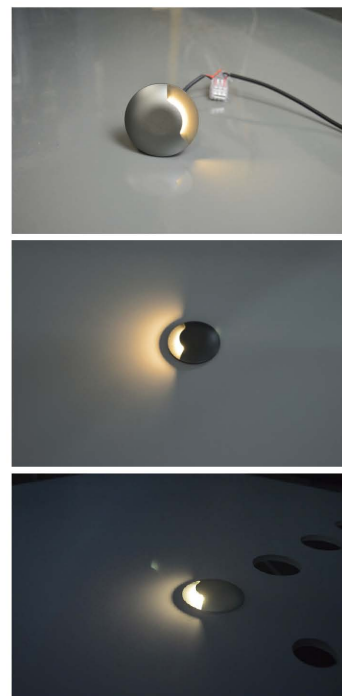

B1302-03/1




- IP Rating: 67
- Optics: Acrylic
- Material : Aluminum



Assemble box

Stainless-Steel 304/316

B1302-04/1



Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-03/1	1W/2W	Ø23	Φ 36*33mm	90	////	60lm/w	12V/24V
B1302-04/1	1W/3W	Ø38	Φ 60*50mm	90	////	60lm/w	12V/24V 110V/230V

SUPER-MINI outdoor *mark light*

2




- IP Rating: 67
- Optics: Acrylic
- Material : Aluminum




Assemble box

Stainless-Steel 304/316

B1302-03/2



B1302-04/2




Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-03/2	1W/2W	Ø23	Φ 36*33mm	90	////	40lm/w	12V/24V
B1302-04/2	1W/3W	Ø38	Φ 60*50mm	90	////	40lm/w	12V/24V 110V/230V

SUPER-MINI outdoor *mark light*

3



B1302-03/3




- IP Rating: 67
- Optics: Acrylic
- Material : Aluminum



Assemble box

Stainless-Steel 304/316


B1302-04/3



Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-03/3	1W/2W	Ø23	Φ 36*33mm	90	////	40lm/w	12V/24V
B1302-04/3	1W/3W	Ø38	Φ 60*50mm	90	////	40lm/w	12V/24V 110V/230V

SUPER-MINI outdoor *mark light*

4

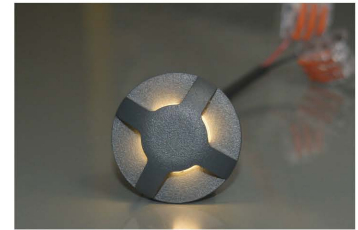


- IP Rating: 67
- Optics:Acrylic
- Material : Aluminum




Assemble box

Stainless-Steel 304/316

B1302-03/4




B1302-04/4



Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1302-03/4	1W/2W	Ø23	Φ 36*33mm	90	////	70lm/w	12V/24V
B1302-04/4	1W/3W	Ø38	Φ 60*50mm	90	////	70lm/w	12V/24V 110V/230V

Parallel connection solution

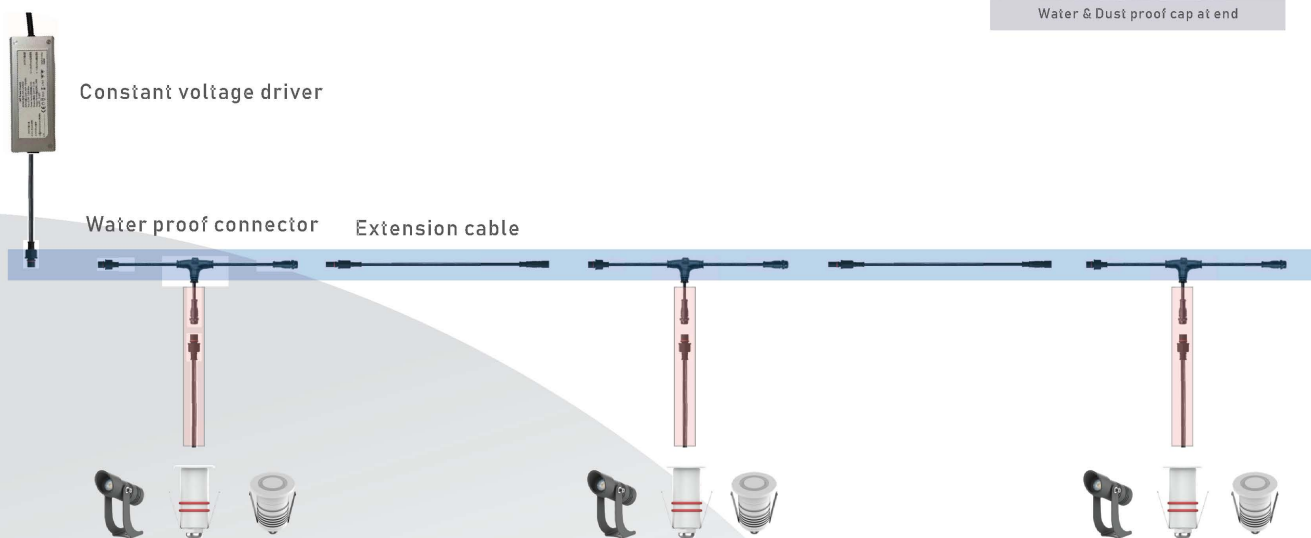

Main-Cable	Standard configuration	1 Meter and 3 Meter
	Max-2.5m ²	10 Meter Main Cable, Maximum Load Wattage 80W
	Max-1.5m ²	10 Meter Main Cable, Maximum Load Wattage 50W
Sub-Cable	Standard configuration	1 Meter Max-0.5m ²



Assemble box

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3, Chaoxing Road Xinhui District JiangMen City, Guangdong Province, China

www.berdisled.com