

**PRODUCTS
PROMOTION**



SUPER-MINI outdoor spotlight IP67



SUPER-MINI outdoor spotlight IP67

Normal standard

1

B1301-06/1
Cut-out: Ø12



2-1

B1301-01/1
Cut-out: Ø16



3-1

B1301-02/1
Cut-out: Ø19



4-1

B1301-03/1
Cut-out: Ø23



Anti-glare standard

2-2

B1301-01/1
Cut-out: Ø16



3-2

B1301-02/1
Cut-out: Ø19



4-2

B1301-03/1
Cut-out: Ø23
Honeycomb Mesh




5

B1301-04/C Cut-out: Ø30
B1301-05/C Cut-out: Ø38



6

B1301-04/D Cut-out: Ø30
B1301-05/D Cut-out: Ø38
Honeycomb Mesh



7

B1301-04/A Cut-out: Ø30
B1301-05/A Cut-out: Ø38



8

B1301-04/B Cut-out: Ø30
B1301-05/B Cut-out: Ø38
Honeycomb Mesh




SUPER-MINI outdoor spotlight IP67

1

B1301-06/A1
 Size: Ø12*36
 Anti-glare standard



- IP Rating: 67
- Optics: Clear Glass, Fog Glass
- Material : Aluminum
 Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome



LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-06/A1	0.5W	Ø10	Φ 12*36mm	90	90°	60lm/w	12V/24V


SUPER-MINI outdoor spotlight IP67

1

B1301-06/B1
 Size: Ø16*30
 Anti-glare standard



- IP Rating: 67
- Optics: Clear Glass, Fog Glass
- Material : Aluminum
 Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome



LED : OSRAM CREE


Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-06/B1	0.5W	Ø12	Φ 16*30mm	90	90°	60lm/w	12V/24V

SUPER-MINI outdoor spotlight IP67

2-1

B1301-01/A
Size: Ø22*33



Fog Glass
Clear Glass
Normal standard



2-2

B1301-01/B1
Size: Ø22*42

Fog Glass
Clear Glass
Anti-glare standard

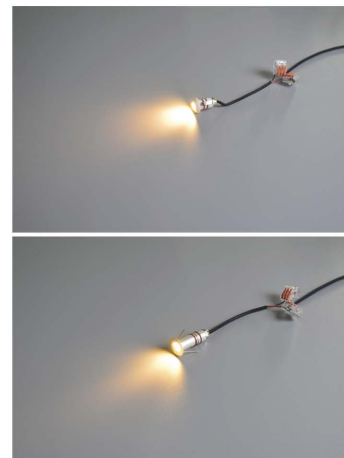

- IP Rating: 67
- Optics: Clear Glass, Fog Glass
- Material : Aluminum
Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome



Assemble box

LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-01/A	1W	Ø16	Φ 22*33mm	90	45°/60°/90°	70lm/w	12V/24V
B1301-01/B	1W	Ø16	Φ 22*42mm	90	45°/60°	50lm/w	12V/24V


SUPER-MINI outdoor spotlight IP67



3-1

B1301-02/A
Size: Ø25*36


Fog Glass
Clear Glass
Normal standard



3-2

B1301-02/B
Size: Ø25*46

Fog Glass
Clear Glass
Anti-glare standard




LED : OSRAM CREE



- IP Rating: 67
- Optics: Clear Glass, Fog Glass
- Material : Aluminum
Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome



Assemble box

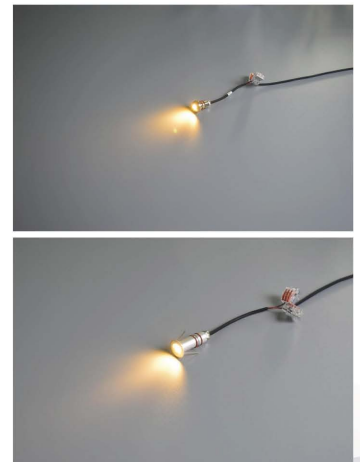


Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-02/A	1W/2W	Ø19	Φ 25*36mm	90	45°/60°/90°	70lm/w	12V/24V
B1301-02/B	1W/3W	Ø19	Φ 25*46mm	90	45°/60°	50lm/w	12V/24V

SUPER-MINI outdoor spotlight IP67

4-1

B1301-03/A1
Size: Ø31*35


Fog Glass
Clear Glass
Normal standard



4-2

B1301-03/B1
Size: Ø31*35


Clear Glass
Honeycomb Mesh
Anti-glare standard



LED : OSRAM CREE



- IP Rating: 67
- Optics: Clear Glass, Fog Glass
- Material : Aluminum
Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome

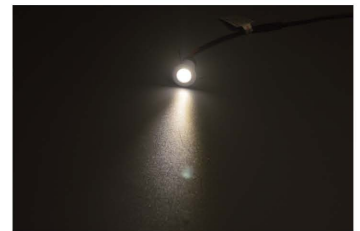


Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-03/A	1W/2W	Ø23	Φ 31*35mm	90	10°/25°/45°/60°/90°	80lm/w	12V/24V
B1301-03/B	1W/2W	Ø23	Φ 31*35mm	90	10°/25°/45°/60°/90°	60lm/w	12V/24V

Appearance Options



Freely match with different color/type frames

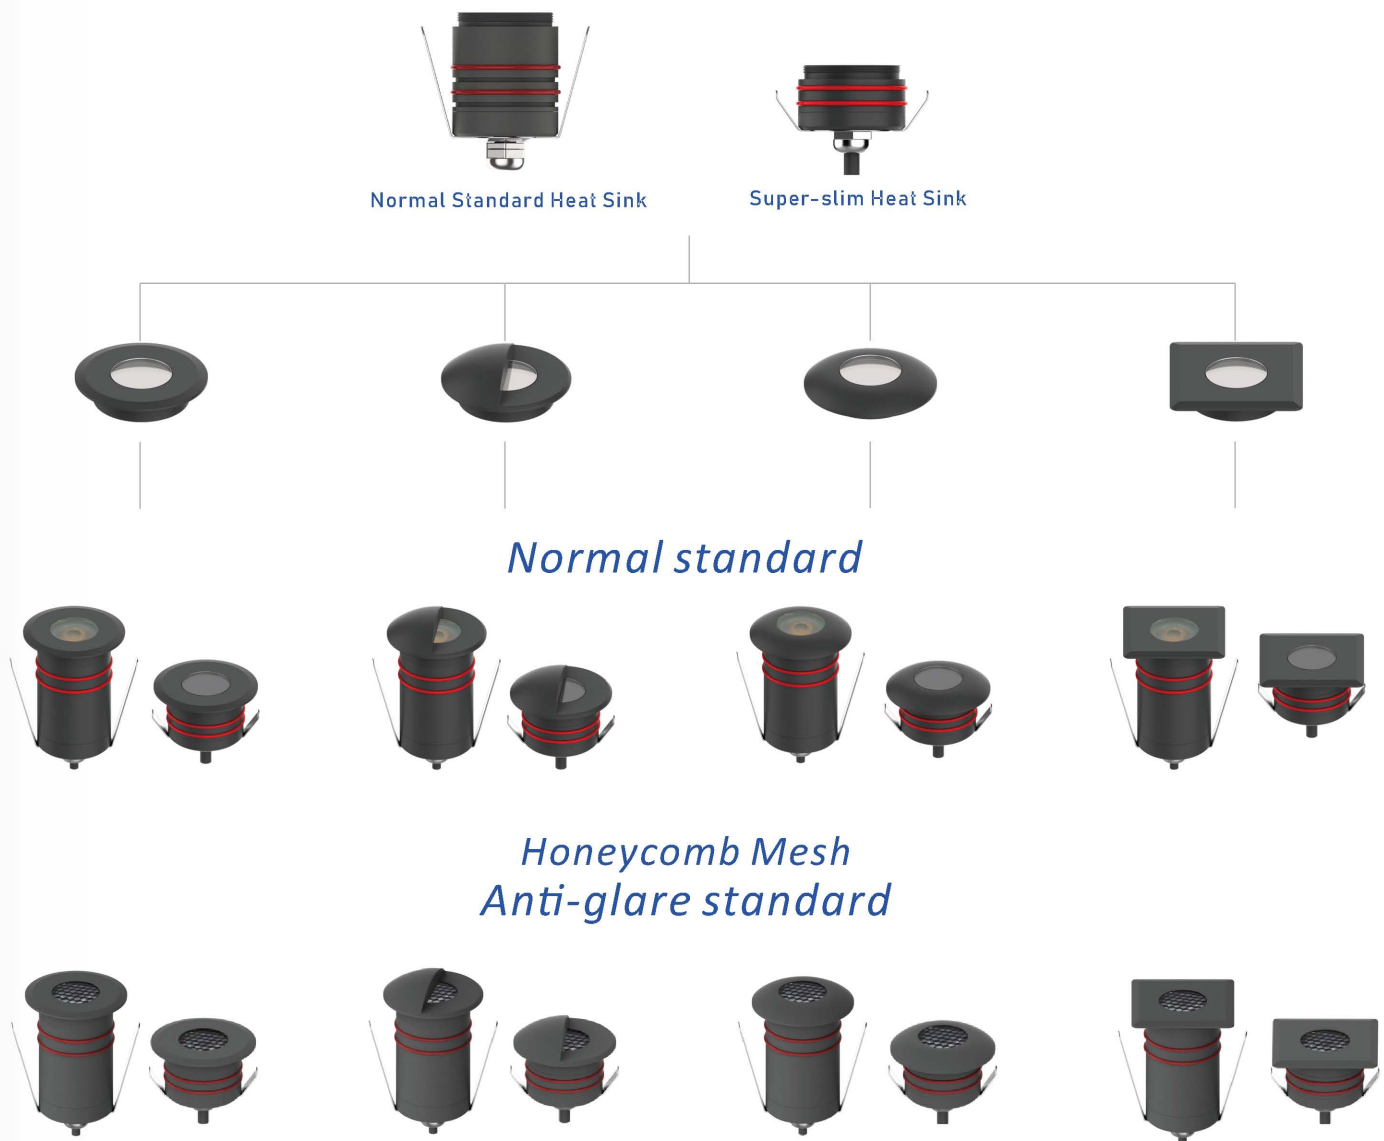

Delivery standard

- Heat sink and frame deliver dividually, free to DIY.
- Heat sink and frame assembled together , not possible to diassemble.
- Can be used for indoor and outdoor
- Color: White, Silver, Black, Antracit

Contact


BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3, Chaoxing Road Xinhui District JiangMen City, Guangdong Province, China

www.berdisled.com

Normal standard
SUPER-MINI outdoor spotlight IP67



- 5-1**
B1301-04/C1 Ø30
B1301-05/C1 Ø38
Clear Glass
Normal standard



- 5-2**
B1301-04/C2 Ø30
B1301-05/C2 Ø38
Clear Glass
Normal standard



- 5-3**
B1301-04/C3 Ø30
B1301-05/C3 Ø38
Clear Glass
Normal standard





- 5-4**
B1301-04/C4 Ø30
B1301-05/C4 Ø38
Clear Glass
Normal standard



- DIY
- Save stock
- Match flexibly
- Frame can be replaced by yourself



Assemble box



LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-04/C	1W/3W	Ø30	Φ 41*50mm	90	90°	80lm/w	12V/24V
B1301-05/C	1W/3W	Ø38	Φ 47*50mm	90		80lm/w	12V/24V

Honeycomb Mesh Anti-glare standard

- 6-1** B1301-04/D1 Ø30
B1301-05/D1 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard



- 6-2** B1301-04/D2 Ø30
B1301-05/D2 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard




- 6-3** B1301-04/D3 Ø30
B1301-05/D3 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard



- 6-4** B1301-04/D4 Ø30
B1301-05/D4 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard




Super-slim Heat Sink

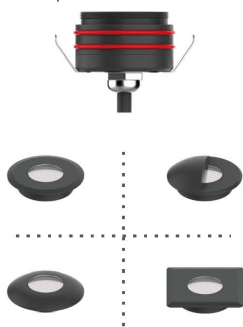

- DIY
- Save stock
- Match flexibly
- Frame can be replaced by yourself



Assemble box

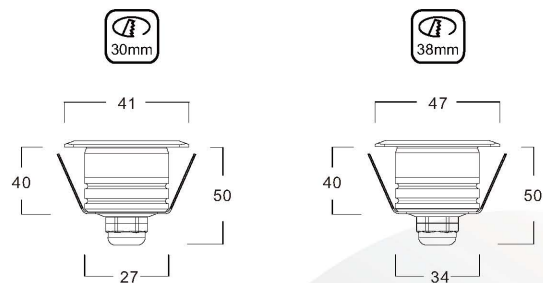

LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-04/D	1W/3W	Ø30	Φ 41*50mm	90	90°	60lm/w	12V/24V
B1301-05/D	1W/3W	Ø38	Φ 47*50mm	90		60lm/w	12V/24V



7-1

B1301-04/A1 Ø30
B1301-05/A1 Ø38
Clear Glass
Normal standard



7-2

B1301-04/A2 Ø30
B1301-05/A2 Ø38
Clear Glass
Normal standard



7-3

B1301-04/A3 Ø30
B1301-05/A3 Ø38
Clear Glass
Normal standard




7-4

B1301-04/A4 Ø30
B1301-05/A4 Ø38
Clear Glass
Normal standard






Normal Standard Heat Sink



- DIY
- Save stock
- Match flexibly
- Frame can be replaced by yourself



Assemble box



LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-04/A1	1W/3W	Ø30	Φ 41*50mm	90	24°/30°/40°/60°	70lm/w	12V/24V 110V/230V
B1301-04/A2	1W/3W	Ø30	Φ 41*69mm	90	25°*45° 30°*60°	70lm/w	12V/24V 110V/230V
B1301-05/A1	1W/3W	Ø38	Φ 41*55mm	90	15°*30° 15°*45° 15°*60° 15°/24°/30°/40°/60°/90°	70lm/w	12V/24V 110V/230V

Normal standard
SUPER-MINI outdoor spotlight IP67



8-1

B1301-04/B1 Ø30
B1301-05/B1 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard



8-2

B1301-04/B2 Ø30
B1301-05/B2 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard



8-3

B1301-04/B3 Ø30
B1301-05/B3 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard





8-4

B1301-04/B4 Ø30
B1301-05/B4 Ø38
Clear Glass
Honeycomb Mesh
Anti-glare standard






Normal Standard Heat Sink

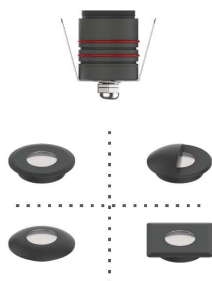

- DIY
- Save stock
- Match flexibly
- Frame can be replaced by yourself




Assemble box

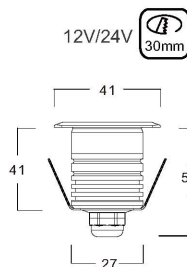

LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-04/B 12V/24V	1W/3W	Ø30	Φ41*50mm	90	24°/30°/40°/60°	70lm/w	12V/24V
B1301-04/B 110V/230V	1W/3W	Ø30	Φ41*69mm	90	25°*45° 30°*60°	70lm/w	110V/230V
B1301-05/B	1W/3W	Ø38	Φ47*55mm	90	15°*30° 15°*45° 15°*60° 15°/24°/30°/40°/60°/90°	70lm/w	12V/24V 110V/230V

Parallel connection solution

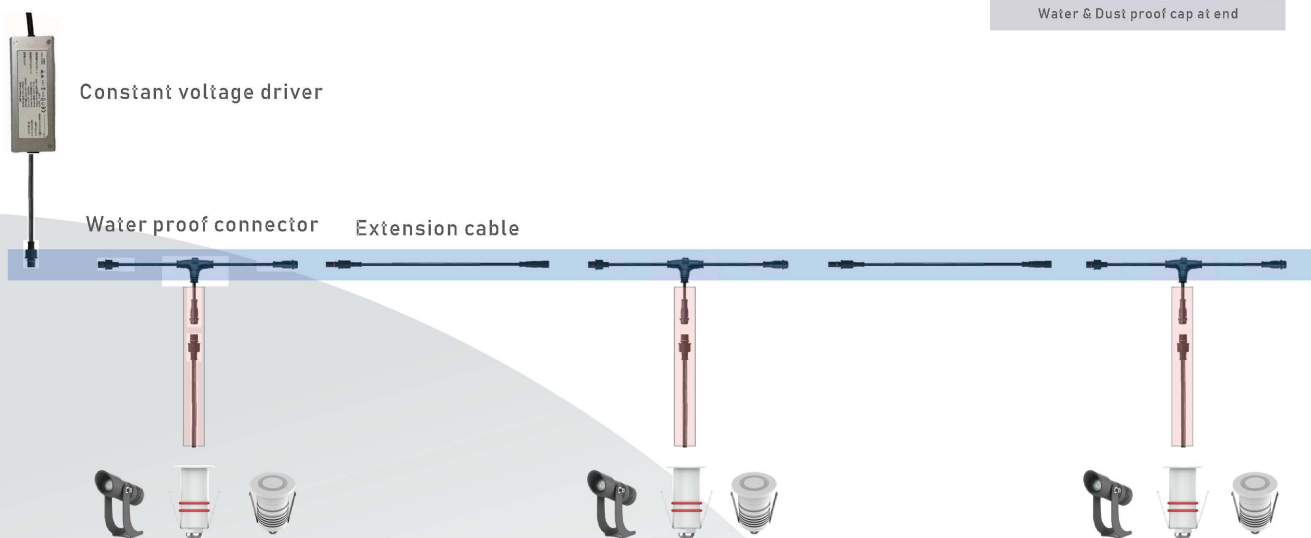

Main-Cable	Standard configuration 1 Meter and 3 Meter
	Max-2.5m ² 10 Meter Main Cable, Maximum Load Wattage 80W
	Max-1.5m ² 10 Meter Main Cable, Maximum Load Wattage 50W
Sub-Cable	Standard configuration 1 Meter Max-0.5m ²



Assemble box

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3, Chaoxing Road Xinhui District JiangMen City, Guangdong Province, China

www.berdisled.com