




**PRODUCTS
PROMOTION**

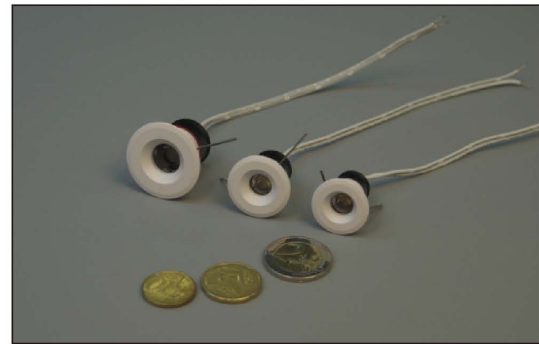

SUPER-MINI indoor spotlight

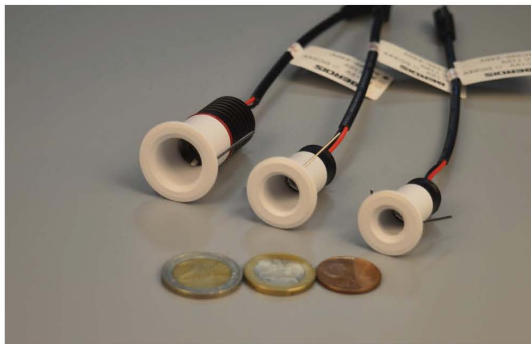

SUPER-MINI indoor spotlight

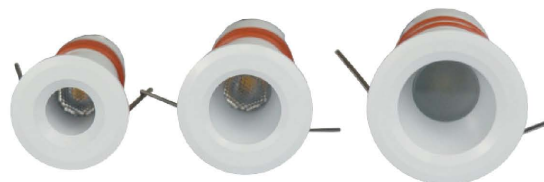

Normal standard

1 B1101-03/1
Cut-out: Ø12



2-1 B1101-04/1
Cut-out: Ø16



3-1 B1101-05/1
Cut-out: Ø19



4-1 B1101-06/1
Cut-out: Ø22



Anti-glare standard

2-2 B1101-04/2
Cut-out: Ø16



3-2 B1101-05/2
Cut-out: Ø19



4-2 B1101-06/2
Cut-out: Ø22



Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.


RoRo Email: sales2@berdisled.com

Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

www.berdisled.com

SUPER-MINI indoor spotlight

1



- IP Rating: 54
 - Optics:Acrylic
 - Material : Aluminum
- Stainless-Steel 304/316
- Color:Silver,White, gray, black, nickel-brushed, chrome


LED : OSRAM CREE

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-06/1	0.5W	Ø12	Φ 16*18mm	90	90°	60lm/w	12V/24V

SUPER-MINI indoor spotlight



2-1

B1101-04/A
Normal standard



2-2

B1101-04/B
Anti-glare standard



LED : OSRAM CREE



- IP Rating: 54
- Optics: Lens
- Material : Aluminum
Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome




Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1101-04/A	1W	Ø16	Φ22*20mm	90	18°/30°/60°	70lm/w	12V/24V 110V/230V
B1101-04/B	1W	Ø16	Φ22*30mm	90	20°*45°	60lm/w	12V/24V 110V/230V

SUPER-MINI indoor spotlight



3-1

B1101-05/A
Normal standard



3-2

B1101-05/B
Anti-glare standard



LED : OSRAM CREE



- IP Rating: 54
- Optics: Lens
- Material : Aluminum
Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome




Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1101-05/A	1W	Ø19	Φ 25*20mm	90	18°/30°/60°	70lm/w	12V/24V 110V/230V
B1101-05/B	1W	Ø19	Φ 25*32mm	90	20°*45°	60lm/w	12V/24V 110V/230V

SUPER-MINI indoor spotlight



4-1

B1101-06/1A
Normal standard



4-2

B1101-06/1B
Anti-glare standard



LED : OSRAM CREE



- IP Rating: 54
- Optics: Lens
- Material : Aluminum
Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome




Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1301-03/1-1	1W/2W	Ø22	Φ 31*23mm	90	15°/25°/30°	70lm/w	12V/24V 110V/230V
B1301-03/1-2	1W/2W	Ø22	Φ 31*33mm	90	40°/60°/80°/100°	60lm/w	12V/24V 110V/230V

SUPER-MINI indoor spotlight



5-1

B1101-06/2A
Normal standard



5-2

B1101-06/2B
Anti-glare standard



LED : OSRAM CREE



- IP Rating: 54
- Optics: Lens
- Material : Aluminum
Stainless-Steel 304/316
- Color: Silver, White, gray, black, nickel-brushed, chrome



Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1101-06/2A	3W	Ø22	Φ 31*35mm	90	15°/25°/30°	70lm/w	12V/24V 110V/230V
B1101-06/2B	3W	Ø22	Φ 31*55mm	90	40°/60°/80°/100°	60lm/w	12V/24V 110V/230V

Multiple voltage control schemes

1

One-To-One External constant current Trailing edge Dimmable driver

- Power : 3W
- PF 0.9
- 5 Years warranty



Single CCT Solution



Trailing edge



CCT Solution

2


One-To-Six External constant current Trailing edge Dimmable driver

- Power : 6*3W
- PF 0.9
- 5 Years warranty

ONE-TO-SIX DRIVER



Dimmable

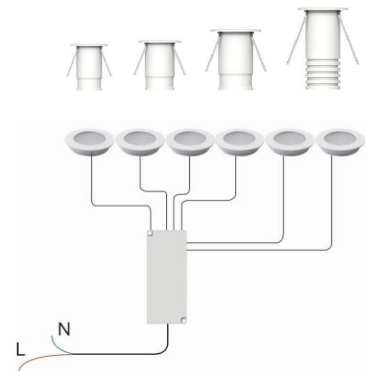

Connect to 110V or 230V

Multiple voltage control schemes

4

DC10-30V wide range voltage solution

- Power : 1W/3W
- 5 Years warranty



Connect to DC10~30V
Connect to battery

5

Connect to 12V or 24V Transformer
Connect to DMX512 Transformer

6

Trailing edge Dimmable driver



Power : 1W/3W
12V DC/24V DC



7

2.4G Smart Control Dimming

- Power : 36*1W/12*3W
- PF : 0.9
- 5 Years warranty
- Remote control
- Brightness Adjust
- Night Light
- 15M,30M,1H Timing Setting
- One driver connect to 36pcs 1W or 12pcs 3W Max. spots



Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

www.berdisled.com