

PRODUCTS PROMOTION



TOP 1 POPULAR PRODUCT IN EUROPE

DTW 1800-2700K

DTW 1800-4000K

DTW 2700-4000K



Outlooking Options

.....

1



Ultra slim Flat adjustable

2



Ultra slim Non-adjustable

3



Bevel frame



Bevel frame
light surface XL

Ultra slim Bevel adjustable

4



Curved frame



Curved frame
light surface XL

Ultra slim Curved adjustable

5



Bevel



Curved

Deep Anti-glare



- Installation height 23mm;
- Deep dimming, flicker-free;
- Ultra thin flat and anti glare design,
• with the addition of honeycone;
- Multiple beam angle options;
- IP 20, IP54, IP65 waterproof;
- Material : Aluminum
- CRI : 90/95




Item NO.	Power	Cut-out	Size	Beam angle	IP Rating
B0101-07	5W	Ø55	Φ62*23mm	24/60°	21/54/65
B0101-03	5W/7W	Ø68~75	Φ82*23mm	24/38/60°	21/54/65
B0101-01	5W/7W	Ø75	Φ85*23mm	15/24/38/60°	21/54/65
B0101-05	5W/7W	Ø75~83	Φ94*23mm	15/24/38/60°	21/54/65
B0101-08	10W/12W	Ø90	Φ104*27mm	60°	21/54
B0101-09	15W	Ø115	Φ130*36mm	60°	21/54/65
B0101-10	20W/24W	Ø165	Φ185*48mm	60°	21/54/65

CONNECTION SOLUTION

1

Driver integrated led spotlight

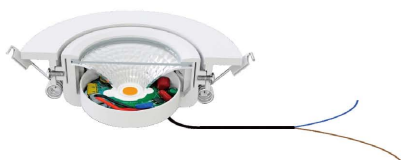

- Connect to **110V** dimmable
- Connect to **230V** dimmable
- Connect to DC10~30V Connect to battery
- Connect to 12V or 24V Transformer
- Connect to DMX512 Transformer

1

3 CCT SWITCH

- 2000K,3000K,4000K
- 2700K,3500K,5000K
- 2700K,4000K,6000K



Trailing edge

1

5 CCT SWITCH+ 3 POWER SWITCH SOLUTION

- 3 Steps Power Switch:3/5/7W
- 2000K,2400K,2700K,3000K,4000K
- 2700K,3000K,3500K,4000K,5000K
- 2700K,3000K,4000K,5000K,6000K



Trailing edge

1

- Connect to **110V** Trailing edge dimmable
- Connect to **230V** Trailing edge dimmable
- Connect to **230V** Constant voltage dimmable
- Connect to **0-10V**
- Connect to **DALI**



1

DIM TO WARM



1800-2800K

1800-4000K

2700-4000K



Trailing edge

2

Smart lighting age

- 2.4G SMART CONTROL DIMMING
- Zigbee +2.4G Application Intelligent Control
- Wifi+Bluetooth Application Intelligent Control

CCT

- 2000K,3000K,4000K
- 2700K,3500K,5000K
- 2700K,4000K,6000K



3

Smart lighting age

- 2.4G SMART CONTROL DIMMING
- Zigbee +2.4G Application Intelligent Control
- Wifi+Bluetooth Application Intelligent Control



RGBCW

- Power :RGB / 3W

CW / 7W

- CCT: C/2700K
W/6000K



1

Motion Sensor Slim Downlight

- Usual Power : 6W
- Emergency power : 3W±1W
- Input:AC90-280V/50-60HZ
- Emergency time : 180min
- Emergency switch time : 1S
- Green light-main power
- Red light-charging
- Yellow light-multifunction
- Test: test button



2

Emergency power supply Downlight

Setting 1


- The motion sensor works both during daytime and night times. It turns on when detecting human movement.
- The fitting won't turn on under strong sunlight during daytime, while very bright during nighttime.
- The fitting won't turn on under strong sunlight during daytime; it works during nighttime when detecting human movement.

Setting 2

- Settings in timing including fitting will be off after 45 seconds, 100 seconds, 3 minutes, without detecting any movement.



Setting 1



Setting 2

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.

RoRo Email: sales2@berdisled.com

Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

www.berdisled.com