

PRODUCTS PROMOTION



TOP 1 POPULAR PRODUCT IN EUROPE

DTW 1800-2700K

DTW 1800-4000K

DTW 2700-4000K





Outlooking Options

1



Ultra slim Flat adjustable

2



Ultra slim Non-adjustable

3



Bevel frame



Bevel frame
light surface XL

Ultra slim Bevel adjustable

4



Curved frame



Curved frame
light surface XL

Ultra slim Curved adjustable

5



Bevel



Curved

Deep Anti-glare

Ultra slim Flat adjustable

1



- Installation height 23mm;
- Deep dimming, flicker-free;
- Ultra thin flat and anti glare design,
- with the addition of honeycone;
- Multiple beam angle options;
- IP 20, IP54, IP65 waterproof;
- Material : Aluminum
- CRI : 90/95
- Optics:Diffuser,Lens,Reflector



Item NO.	Power	Cut-out	Size	Beam angle	IP Rating
B0101-07	5W	Ø55	Φ62*23mm	24/60°	21/54/65
B0101-03	5W/7W	Ø68~75	Φ82*23mm	24/38/60°	21/54/65
B0101-01	5W/7W	Ø75	Φ85*23mm	15/24/38/60°	21/54/65
B0101-05	5W/7W	Ø75~83	Φ94*23mm	15/24/38/60°	21/54/65
B0101-08	10W/12W	Ø90	Φ104*27mm	60°	21/54
B0101-09	15W	Ø115	Φ130*36mm	60°	21/54/65
B0101-10	20W/24W	Ø165	Φ185*48mm	60°	21/54/65

Ultra slim Non-adjustable

2



- Installation height 23mm;
- Deep dimming, flicker-free;
- Ultra thin flat and anti glare design,
- with the addition of honeycone;
- Multiple beam angle options;
- IP 20, IP54, IP65 waterproof;
- Material : Aluminum
- CRI : 90/95
- Optics:Diffuser,Lens,Reflector



Item NO.	Power	Cut-out	Size	Beam angle	IP Rating
B0101-07/2	5W	Ø55	Φ62*23mm	15/24/38/60°	21/54/65
B0101-01/2	5W/7W	Ø68~75	Φ82*23mm	15/24/38/60°	21/54/65
B0101-08/2	10W/12W	Ø80~90	Φ100*31mm	60°	21/54

Ultra slim Bevel adjustable

3



- Installation height 23mm;
- Deep dimming, flicker-free;
- Ultra thin flat and anti glare design,
• with the addition of honeycone;
- Multiple beam angle options;
- IP 20, IP54, IP65 waterproof;
- Material : Aluminum
- CRI : 90/95
- Optics: Lens, Reflector



Item NO.	Power	Cut-out	Size	Beam angle	IP Rating
B0107-01/1	5W	Ø55	Φ62*23mm	15/24/38/60°	21/54/65
B0107-02/1	5W/7W	Ø75	Φ85*23mm	15/24/38/60°	21/54/65
B0107-05/1	5W/7W	Ø75~83	Φ94*23mm	15/24/38/60°	21/54/65
B0107-08/1	10W/12W	Ø90	Φ104*27mm	60°	21/54
B0107-09	15W	Ø115	Φ130*36mm	60°	21/54/65
B0107-10	18W/20W/24W	Ø165	Φ185*48mm	60°	21/54/65

Ultra slim Curved adjustable

4



- Installation height 23mm;
- Deep dimming, flicker-free;
- Ultra thin flat and anti glare design,
- with the addition of honeycone;
- Multiple beam angle options;
- IP 20, IP54, IP65 waterproof;
- Material : Aluminum
- CRI : 90/95
- Optics: Lens, Reflector




Item NO.	Power	Cut-out	Size	Beam angle	IP Rating
B0107-01/2	5W	Ø55	Φ62*23mm	15/24/38/60°	21/54/65
B0107-02/2	5W/7W	Ø75	Φ85*23mm	15/24/38/60°	21/54/65
B0107-05/2	5W/7W	Ø75~83	Φ94*23mm	15/24/38/60°	21/54/65
B0107-08/2	10W/12W	Ø90	Φ104*27mm	60°	21/54

CONNECTION SOLUTION

1

Driver integrated led spotlight

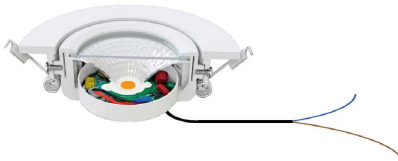

- Connect to **110V dimmable**
- Connect to **230V dimmable**
- Connect to **DC10~30V** Connect to battery
- Connect to **12V or 24V Transformer**
Connect to **DMX512 Transformer**

2

3 CCT SWITCH

- 2000K,3000K,4000K
- 2700K,3500K,5000K
- 2700K,4000K,6000K



3

5 CCT SWITCH+ 3 POWER SWITCH SOLUTION

- 3 Steps Power Switch:3/5/7W
- 2000K,2400K,2700K,3000K,4000K
- 2700K,3000K,3500K,4000K,5000K
- 2700K,3000K,4000K,5000K,6000K



4

- Connect to **110V** Trailing edge dimmable
- Connect to **230V** Trailing edge dimmable
- Connect to **230V** Constant voltage dimmable
- Connect to **0-10V**
- Connect to **DALI**



1

DIM TO WARM



- 1800-2800K
- 1800-4000K
- 2700-4000K



2

Smart lighting age

- 2.4G SMART CONTROL DIMMING
- Zigbee +2.4G Application Intelligent Control
- Wifi+Bluetooth Application Intelligent Control

- CCT
- 2000K,3000K,4000K
 - 2700K,3500K,5000K
 - 2700K,4000K,6000K



3

Smart lighting age

- 2.4G SMART CONTROL DIMMING
- Zigbee +2.4G Application Intelligent Control
- Wifi+Bluetooth Application Intelligent Control

- RGBCW
- Power : RGB / 3W
CW / 7W
 - CCT : C/2700K
W/6000K



1

Motion Sensor Slim Downlight

- Usual Power : 6W
- Emergency power : 3W±1W
- Input:AC90-280V/50-60HZ
- Emergency time : 180min
- Emergency switch time : 1S
- Green light-main power
- Red light-charging
- Yellow light-multifunction
- Test: test button



2

Emergency power supply Downlight

Setting 1

- The motion sensor works both during daytime and night times. It turns on when detecting human movement.
- The fitting won't turn on under strong sunlight during daytime, while very bright during nighttime.
- The fitting won't turn on under strong sunlight during daytime; it works during nighttime when detecting human movement.

Setting 2

- Settings in timing including fitting will be off after 45 seconds, 100 seconds, 3 minutes, without detecting any movement.



Setting 1

Setting 2