BDS
BERDIS
LIGHTING

PRODUCTS PROMOTION

- *Mark Light*
- *Atmosphere light*

LED : OSRAM CREE

Lighting Council AUSTRALIA MEMBER

ENABLED Member EnabLED Licensing Program for LED Luminaires and Retrofit Bulbs

RA ≥90 | 110V 230V | 12V 24V | SAA | ETL | FC | CE | IC | IC-F | RoHS | 5Y Warranty

www.berdisled.com

BDS®
BERDIS
LIGHTING

REPLACEABLE VERSION
Freely match with different color/type frames.

IP68

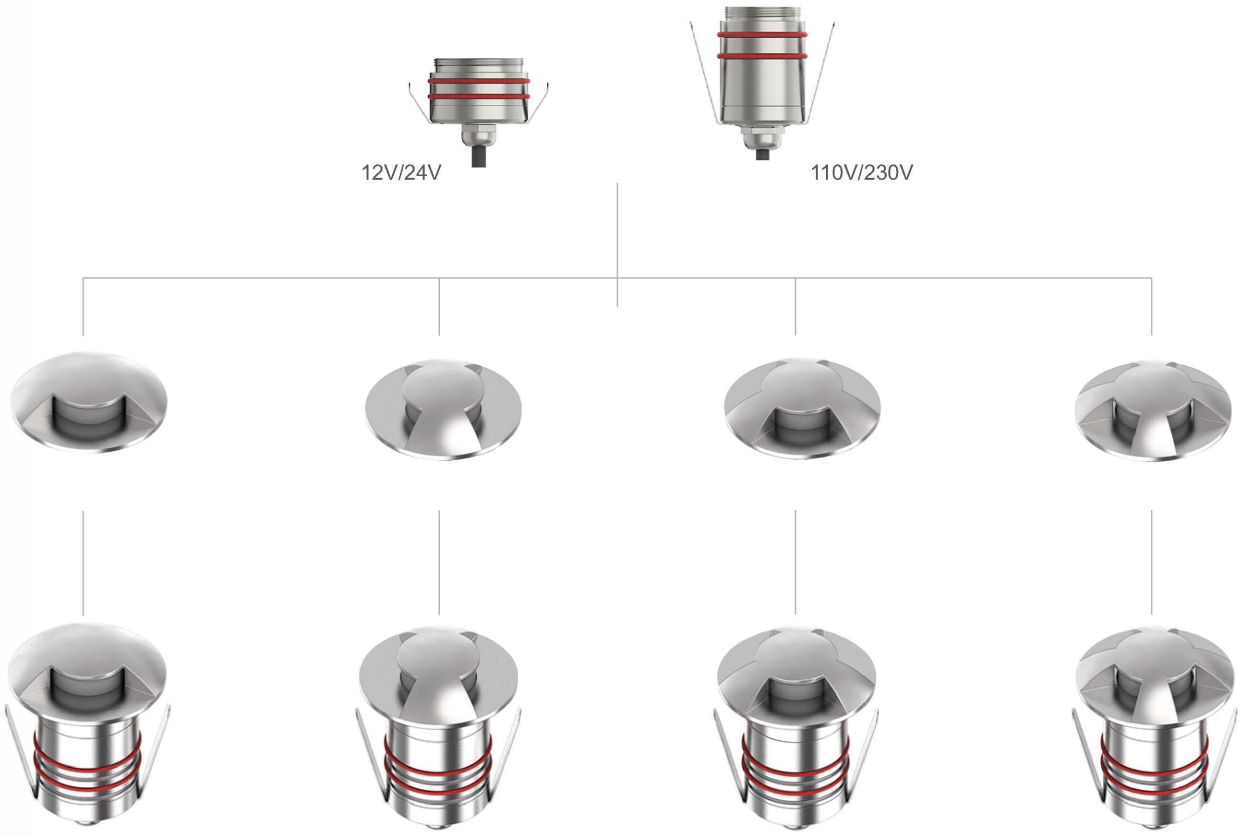

Two delivery standard

- Heat sink and frame deliver dividually,free to DIY , IP Rating: **67.**
- Heat sink and frame assembled together ,
  not possible to diassemble , IP Rating: **68.**
- Color: Original Color, White, Gray, Black

Assemble box

Contact
BERDIS LIGHTING (JIANG MEN) CO., LTD.
RoRo Email: sales2@berdisled.com
Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

BDS®
BERDIS
LIGHTING

STAINLESS-STEEL MATERIAL
SUPER-MINI outdoor *mark light*

1 B1402-04/1 Ø38

3 B1402-04/3 Ø38

2 B1402-04/1 Ø38

4 B1402-04/4 Ø38

Assemble box

- IP Rating: 67/68
- Optics:Acrylic
- Material : Stainless-Steel 304/316

38mm





Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1402-04 12V/24V	1W/3W	Ø38	Φ60*30mm	90	/////	60lm/w	12V/24V
B1402-04 110V/230V	1W/3W	Ø38	Φ60*50mm	90	/////	60lm/w	110V/230V

BDS®
BERDIS
LIGHTING

REPLACEABLE VERSION
Freely match with different color/type frames.

IP68

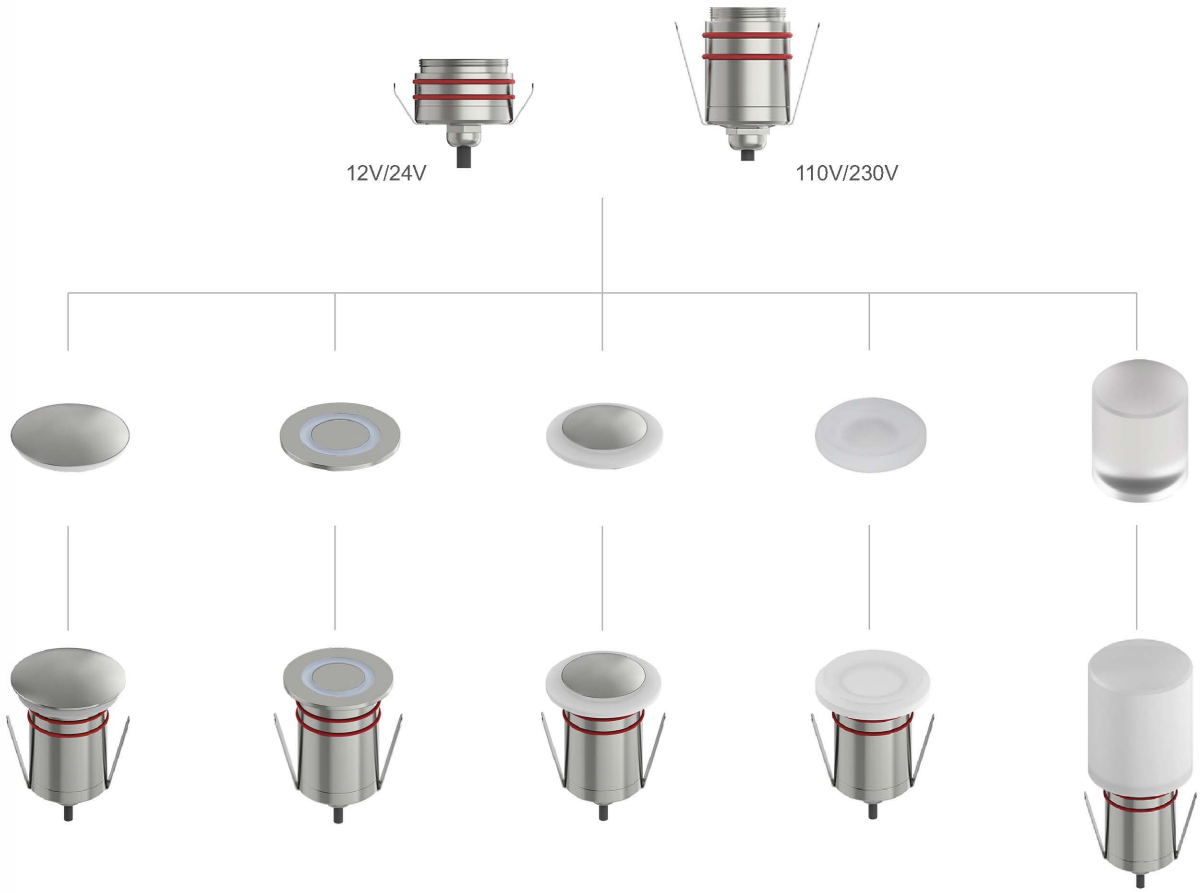

Two delivery standard

- Heat sink and frame deliver dividually,free to DIY , IP Rating: **67.**
- Heat sink and frame assembled together ,
  not possible to diassemble , IP Rating: **68.**
- Color:Original Color, White, Gray, Black

Assemble box

Contact
BERDIS LIGHTING (JIANG MEN) CO., LTD.
RoRo Email: sales2@berdisled.com
Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

BDS®
BERDIS
LIGHTING

STAINLESS-STEEL MATERIAL
SUPER-MINI *Atmosphere light*

1 B1402-02/2 Ø38

3 B1402-02/5 Ø38

2 B1402-02/3 Ø38

4 B1402-02/4 Ø38

- IP Rating: 67/68
- Optics:Acrylic
- Material : Stainless-Steel 304/316

Assemble box





Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1402-02 12V/24V	1W/3W	Ø38	Φ50*32mm	90	/////	50lm/w	12V/24V
B1402-02 110V/230V	1W/3W	Ø38	Φ50*52mm	90	/////	50lm/w	110V/230V

BERDIS LIGHTING

STAINLESS-STEEL MATERIAL
SUPER-MINI *Atmosphere light*

5 B1402-02/1 Ø38

12V/24V



110V/230V



Assemble box

- IP Rating: 67/68
- Optics:Acrylic
- Material : Stainless-Steel 304/316

Item NO.	Power	Cut-out	Size	CRI	Beam angle	Lumen	Voltage
B1402-02/1 12V/24V	1W/3W	Ø38	Φ50*32mm	90	/////	60lm/w	12V/24V
B1402-02/1 110V/230V	1W/3W	Ø38	Φ50*52mm	90	/////	60lm/w	110V/230V

BDS®
BERDIS
LIGHTING

Parallel connetion solution

Water proof connector

Cable connect to driver

Extension cable

Water & Dust proof cap at end

Constant voltage driver

Main-Cable	Standard configuration 1 Meter and 3 Meter	
Max-2.5m²	10 Meter Main Cable,Maximum Load Wattage 80W	
Max-1.5m²	10 Meter Main Cable,Maximum Load Wattage 50W	
Sub-Cable	Standard configuration 1 Meter	Max-0.5m²

Assemble box

Contact

BERDIS LIGHTING (JIANG MEN) CO., LTD.
RoRo Email: sales2@berdisled.com
Add: NO.19-3,Chaoxing Road Xinhui District JiangMen City,Guangdong Province,China

www.berdisled.com