



Mini Indoor Spotlight


LED: osram CREE

- Installation height 6 mm
- Voltage: 100~ 265V ac
12V/24V dc 9~ 36V dc



2 TYPES INSTALLATION

- Connect the wire from the inside of the board
- Connect the wire from behind the board
- Ultra-thin and small, can be embed in the board

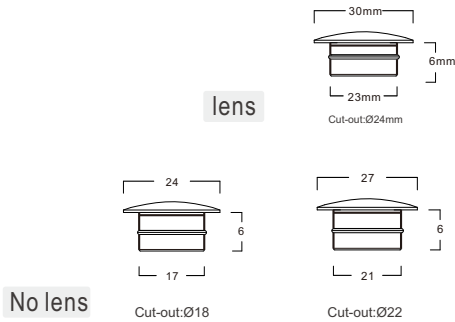

Item NO.	Power	Cut-out	CRI	Beam angle	IP Rating	Material
B0110-07/A1	0.5W	Ø18	90	60°	21	Aluminum
B0110-07/A2	0.5W/1W	Ø22	90	60°	21	Aluminum
B0110-07/A3	0.5W/1W	Ø25	90	15°/20°/25°/38° 60°/20°40°/90°	21/54	Aluminum



DRIVER DATA SHEET(Flicker-free Driver)

Wattage	0.5W	1W
Dimmable	YES	NO
Input rated Voltage	DC12V/24V	AC100~265V
Frequency	50/60Hz	50/60Hz
Input Voltage	////	AC90~305V
Efficiency	PASS	≥73%
Power Factor	PASS	≥0.5
Rated input current	≤0.01~0.03A	≤0.02A
Full load output Voltage	DC12V/24V	DC2~4V
Rated output current	////	260mA
Output current range	////	260mA±5%
Dimming Type	DALI/1-10V/12,24V DC	////
Dimming range	////	
Total harmonic distortion (THD)	////	
Power tolerance	10%	
Current output tolerance	±5%	
Short circuit protection	PASS	
Over voltage protection	PASS	
Over temperature protection	PASS	

FIXTURE COMPATIBILITY

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
0.5W/1W	II@III	Ip20	-20℃~45℃	0~90%	-20℃~55℃

PACKAGING INFORMATION

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	30*30*23.7	0.1	13	100

