



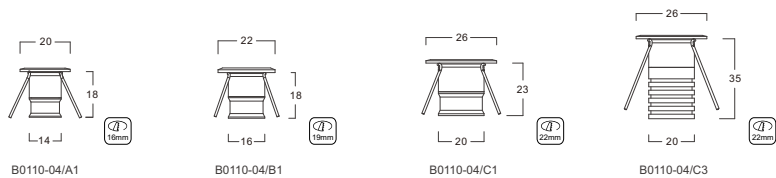

Mini Indoor Spotlight



- CUT-OUT: Ø16, Ø19, Ø22
- Voltage:100~ 265V ac
12V/24V dc 9~36V dc

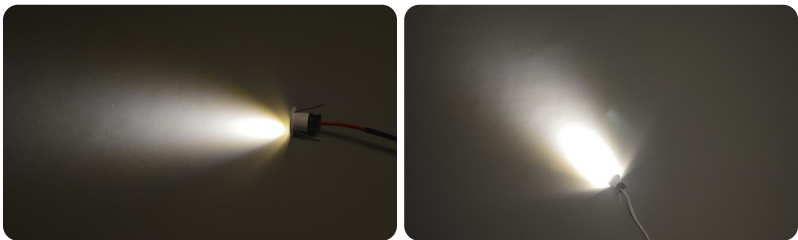

Item NO.	Power	Cut-out	CRI	Beam angle	IP Rating	Material
B0110-04/A1	1W	Ø16	90	18°/30°/60°	21/54	Aluminum
B0110-04/B1	1W	Ø19	90	18°/30°/60°	21/54	Aluminum
B0110-04/C1	1W	Ø22	90	10°/25°/30°/40° 60°/80°/25°45°	21/54	Aluminum
B0110-04/C3	1W/3W	Ø22	90	10°/25°/30°/40° 60°/80°/25°45°	21/54	Aluminum

Deep Anti-Glare
Mini Indoor Spotlight

- CUT-OUT: Ø16, Ø19, Ø22
- Voltage:100~ 265V ac
12V/24V dc , 9~ 36V dc

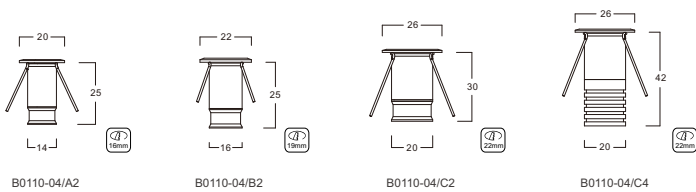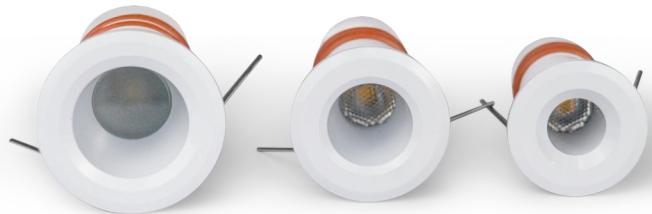

Item NO.	Power	Cut-out	CRI	Beam angle	IP Rating	Material
B0110-04/A2	1W	Ø16	90	18°/30°/60°	21/54	Aluminum
B0110-04/B2	1W	Ø19	90	18°/30°/60°	21/54	Aluminum
B0110-04/C2	1W	Ø22	90	10°/25°/30°/40° 60°/80°/25°45°	21/54	Aluminum
B0110-04/C4	1W/3W	Ø22	90	10°/25°/30°/40° 60°/80°/25°45°	21/54	Aluminum



DRIVER DATA SHEET(Flicker-free Driver)


Wattage	1W/3W	3W	1W/3W
Dimmable	YES	YES	NO
Input rated Voltage	DC12V/24V	AC200-240V	AC100-265V
Frequency	50/60Hz	50/60Hz	50/60Hz
Input Voltage	DC9-36V	AC180-265V	AC90-305V
Efficiency	PASS	≥58%	≥73%
Power Factor	PASS	≥0.9	≥0.5
Rated input current	≤0.05~0.25A	≤ 0.02A	≤0.02A
Full load output Voltage	DC12V/24V	DC252V	DC14-25V&28-42V
Rated output current	////	20mA	260mA/130mA/70mA
Output current range	////	20mA±1%	260mA/130mA/70mA±5%
Dimming Type	DALI/1-10V/9~36V DC	Trailing edge Dimmable Dimmable Driver Integrated	////
Dimming range	10%-100%		////
Total harmonic distortion (THD)	////	≤20%	
Power tolerance	10%		
Current output tolerance	±5%		
Short circuit protection	PASS		
Over voltage protection	PASS		
Over temperature protection	PASS		

FIXTURE COMPATIBILITY

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
1W/3W	II	IP21/54/65	-20℃~45℃	0~90%	-20℃~55℃

PACKAGING INFORMATION

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCs)
Carton	30*30*23.7	0.1	13	100



Mini Indoor Spotlight

LED: **osram** **CREE**

Voltage: 12V/24V 9~36V 100~265V



A lamp Freely match with random 2CCT
CCT: R,G,B,and 2000K,2500K,2700K,3000K,4000K,6000K,