




中国认可  
国际互认  
检测  
TESTING  
CNAS L5772

Report No.: PTC802139160815-LD01

<b>TEST REPORT</b> <b>EN 60598-2-1</b> <b>Luminaires</b> <b>Part 2: Particular requirements:</b> <b>Section One-Fixed general purpose luminaires</b>	
Report Number. ....:	PTC802139160815-LD01
Date(s) of performance of tests .....	August 08, 2016 ~ August 22, 2016
Date of issue .....	August 22, 2016
Tested by (name + signature).....:	Even Li
Approved by (name + signature) ....:	Chris Du
Testing Laboratory Name .....	Dongguan Precise Testing & Certification Corp., Ltd.
Address .....	Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China
Applicant's name.....:	Berdis Lighting Co.,LTD.
Address .....	Floor 6, No 1., Huatai East Road, Caosan Industrial Park, Guzhen Town, Zhongshan City, Guangdong, Province
Manufacturer's name .....	Berdis Lighting Co.,LTD.
Address .....	Floor 6, No 1., Huatai East Road, Caosan Industrial Park, Guzhen Town, Zhongshan City, Guangdong, Province
<b>Test specification:</b>	
Standard .....	EN 60598-2-1: 1989; EN 60598-1: 2015; EN 62031: 2008+A1: 2013+A2: 2015; EN 62493: 2015; EN 62471: 2008
Test procedure .....	Compliance with EN 60598-2-1: 1989; EN 60598-1: 2015; EN 62031: 2008+A1: 2013+A2: 2015; EN 62493: 2015; EN 62471: 2008
Test item description .....	LED HIGH BAY
Trade Mark.....:	 <b>BERDIS</b> LIGHTING
Model/Type reference.....:	See model list
Ratings.....:	See model list
This report is only for applicant use. Any copying this report to/for any other person or entity, and use our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification	




Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 http:// www.pts-testing.com



<p><b>General remarks</b></p> <p>"(see remark #)" refers to a remark appended to the report.</p> <p>"(see Annex #)" refers to an annex appended to the report.</p> <p>Clause numbers between brackets refer to clauses in EN 60598-1.</p> <p>Throughout this report a comma is used as the decimal separator.</p> <p><b>The test results presented in this report relate only to the object tested.</b></p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>Unless otherwise specified, test are made under normal conditions at an ambient temperature within the range of 15 °C air pressure of 860mbar of 1060mbar</p>	<p><b>Attachment with:</b></p> <ul style="list-style-type: none"><li>- Attachment No.1: EN 62031.</li><li>- Attachment No.2: EN 62471.</li></ul> <p>(It is not within the scope of CNAS.)</p> <p>-ANNEX A: Photo Documents</p>
<p><b>Summary of testing:</b></p> <ul style="list-style-type: none"><li>- The sample found to comply with the requirements of the relevant standard(s).</li><li>- All models are similar except size and shape appearance, all test conducted on model B0801-XX-300-ZZZ.</li></ul>	
<p><b>Testing location:</b></p> <p>Dongguan Precise Testing &amp; Certification Corp., Ltd. Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China.</p>	
<p><b>Summary of compliance with National Differences</b></p>	

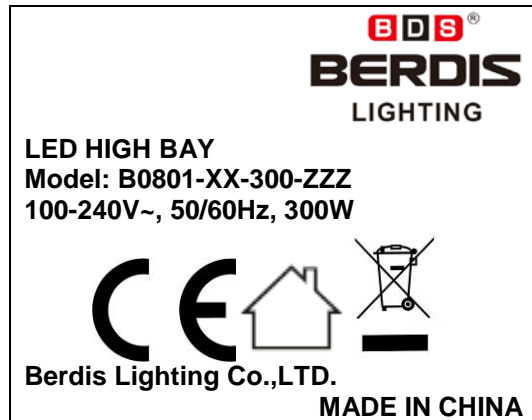**Copy of marking plate:**


Remarks: labels of other models are the same except model No. and rated power.

**General product information:**

The products are fixed luminaires and indoor use.

All models are identical except appearance size and rated power.

The specified max. ambient temperature is 25°C.

**Model list:**

Model	Rating	CCT	Driver
B08-XX-050-ZZZ	100-240V~, 50/60Hz, 50W	6000K	ADS-50W1A5-MEP, 3PCS
B0801-XX-100-ZZZ	100-240V~, 50/60Hz, 100W	6000K	ADS-50W1A5-MEP, 3PCS
B0801-XX-120-ZZZ	100-240V~, 50/60Hz, 120W	6000K	ADS-50W1A5-MEP, 3PCS
B0801-XX-150-ZZZ	100-240V~, 50/60Hz, 150W	6000K	ADS-50W1A5-MEP, 3PCS
B0801-XX-180-ZZZ	100-240V~, 50/60Hz, 180W	6000K	ADS-50W1A5-MEP, 4PCS
B0801-XX-200-ZZZ	100-240V~, 50/60Hz, 200W	6000K	ADS-50W1A5-MEP, 4PCS
B0801-XX-250-ZZZ	100-240V~, 50/60Hz, 250W	6000K	ADS-50W1A5-MEP, 5PCS
B0801-XX-300-ZZZ	100-240V~, 50/60Hz, 300W	6000K	ADS-50W1A5-MEP, 6PCS

Series B08-XX-YYY-ZZZ and B0801-XX-YYY-ZZZ.  
 Remark: "XX" represent for size of the lampshade;  
 "YYY" represent for power, It can be 050, 100, 120, 150, 180, 200, 250, 300;  
 "ZZZ" represent for code of the product.



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
<b>1.1 (0)</b>	<b>SCOPE (GENERAL INTRODUCTION)</b>		<b>P</b>
1.1 (0.1)	Scope		--
	Information for luminaires design considered	Yes [ <input checked="" type="checkbox"/> ]      No [ <input type="checkbox"/> ]	P
	Supply voltage	100-240V~	P
1.1 (0.2)	Normative references		--
<b>1.2 (0.3)</b>	<b>GENERAL REQUIREMENTS</b>		<b>P</b>
1.2 (0.4)	General test requirements and verification		P
<b>1.3 (1)</b>	<b>TERMS AND DEFINITIONS</b>		<b>P</b>
<b>1.4 (2)</b>	<b>CLASSIFICATION</b>		<b>P</b>
1.4 (2.1)	General		--
1.4 (2.2)	Type of protection .....	Class I	P
1.4 (2.3)	Degree of protection .....	IP20	P
1.4 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces .....	Yes	P
	Luminaire not suitable for direct mounting on normally flammable surfaces .....	No	N
1.4 (2.5)	Luminaire for normal use .....	Yes	P
	Luminaire for rough service .....	No	N
<b>1.5 (3)</b>	<b>MARKING</b>		<b>P</b>
1.5 (3.1)	General		--
1.5 (3.2)	Markings on luminaires	See marking label	P
	a)Marking to be observed when replacing lamps or other replaceable components		N
	b)Marking to be observed during installation	The height of symbols more than 5mm, text more than 2mm	P
	c)Marking to be observed after installation		N
	Format of symbols/text	The height of symbols more than 5mm, except for	P

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601      Fax: 86-769-23368602      [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
		symbols for class II and class III classification minimum of 3 mm, and symbols of not suitable for direct mounting on normally flammable surfaces minimum 25mm; text more than 2mm	
1.5 (3.3)	Additional information		P
	Language of instructions	In official language	P
1.5 (3.3.1)	Combination luminaires	Not combination luminaire	N
1.5 (3.3.2)	Nominal frequency in Hz	50/60Hz	P
1.5 (3.3.3)	Operating temperature		P
1.5 (3.3.4)	Symbol or warning notice		N
1.5 (3.3.5)	Wiring diagram	See the manual	P
1.5 (3.3.6)	Special conditions	No such special conditions	N
1.5 (3.3.7)	Metal halid lamp luminaire – warning		N
1.5 (3.3.8)	Limitation for semi-luminaires		N
1.5 (3.3.9)	Power factor and supply current for supply information		P
1.5 (3.3.10)	Suitability for use indoors		P
1.5 (3.3.11)	Luminaires with remote control	Not such construction	N
1.5 (3.3.12)	Clip-mounted luminaire - warning		N
1.5 (3.3.13)	Specifications of protective shields		N
1.5 (3.3.14)	Symbol for nature of supply	~	P
1.5 (3.3.15)	Rated current of socket outlet	No socket outlet	N
1.5 (3.3.16)	Rough service luminaire	Normal service luminaire	N
1.5 (3.3.17)	Mounting instruction for type Y, Type Z and some type X attachments	Type Z	P
1.5 (3.3.18)	Non-ordinary luminaires with PVC cable		N
1.5 (3.3.19)	Protective conductor current in instruction if applicable		N
1.5 (3.3.20)	Provided with information if not intended to be mounted within arms reach		N

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
1.5 (3.3.21)	Luminaires with non replaceable and non-user replaceable light source		P
1.5 (3.3.22)	Controllable luminaires		N
1.5 (3.4)	Test with water and petroleum spirit	15s	P
	Legible after test	Marking still be legible, marking labels not be easily removable and no curling.	P

<b>1.6 (4)</b>	<b>CONSTRUCTION</b>		<b>P</b>
1.6 (4.1)	General		--
1.6 (4.2)	Components replaceable without difficulty		P
1.6 (4.3)	Wireways smooth and free from sharp edges		P
1.6 (4.4)	Lampholders	No lampholder	N
1.6 (4.4.1)	Integral lampholder		N
1.6 (4.4.2)	Wiring connection		N
1.6 (4.4.3)	Lampholder for end-to-end mounting	No such lampholder	N
1.6 (4.4.4)	Positioning		N
	Lampholders for a fluorescent lamp		N
	- pressure test (N).....:		N
	After test the lampholder comply with relevant standard sheets and show no damage		N
	After test on signal-capped lampholder the lampholder have not moved form its position and show no permanent deformation		N
	Edison screw or bayonet-capped lampholders		N
	- bending test (Nm).....:		N
	After test the lamholder have not moved from its position and show no permanent deformation		N
1.6 (4.4.5)	Luminaires with ignitor	Not ignitor	N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
1.6 (4.4.6)	Centre contact	Not ignitor	N
1.6 (4.4.7)	Parts in rough service luminaires resistant to tracking	Not for rough service	N
1.6 (4.4.8)	Lamp connectors	No lamp connector	N
1.6 (4.4.9)	Caps and bases correctly used		N
1.6 (4.4.10)	Lampholder or connector according to IEC60061		N
1.6 (4.5)	Starter holders	No such parts	N
	Starter holder in luminaries other than Class II		N
	Starter holder Class II construction		N
1.6 (4.6)	Terminal blocks		N
	Tails		N
	Unsecured blocks		N
1.6 (4.7)	Terminals and supply connections		P
	Luminaries type		P
1.6 (4.7.1)	Taken to prevent metal parts from becoming live due to a detached wire or screw		N
1.6 (4.7.2)	Supply terminals		N
	8 mm test live conductor		N
1.6 (4.7.3)	Terminals for supply cords		N
1.6 (4.7.3.1)	Welding method and material		N
	- stranded or solid wire of copper materials		N
	- spot welding		N
	- welding of wire and plate		N
	- welded connections are used in type Z attachments only		N
	- mechanical test according to 15.6.2		N
	- electrical test according to 15.6.3		N
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N
1.6 (4.7.4)	Terminals other than supply connection		N

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	- comply with the requirements of Sections 14 and 15		N
1.6 (4.7.5)	Heat-resistant wiring/sleeves	The external wiring or supply cord is unsuitable for the temperatures reached inside the luminaire	N
1.6 (4.7.6)	Multi-pole plug and socket		N
	- test at 30 N		N
1.6 (4.8)	Switches:		N
	- adequate rating		N
	- adequate fixing		N
	- degree of protection		N
	- polarized supply		N
	- compliance with 61058-1 for electronic switches		N
1.6 (4.9)	Insulating lining and sleeves		P
1.6 (4.9.1)	Reliably retained in position		P
1.6 (4.9.2)	Adequate mechanical, electrical and thermal strength		P
	Resistant to temperature >20°C to the wire temperature or		N
	a) & c) insulation resistance and electric strength		N
	b) roast test. Temperature (°C)		N
1.6 (4.10)	Insulation of Class II luminaires		N
1.6 (4.10.1)	No contact, mounting surface - accessible metal parts - wiring of basic insulation		N
	Safe installation fixed luminaires		N
	Capacitors and switches		N
	Interference suppression capacitors according to IEC 60384-14 and their connection accordance with 8.6 of IEC60065:2001		N
1.6 (4.10.2)	Assembly gaps:		P





EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	- not coincidental		P
	- no straight access with test probe		P
1.6 (4.10.3)	Supplementary insulation or reinforced insulation:		N
	- fixed		N
	- unable to be replaced; luminaire inoperative		N
	- sleeves retained in position		N
	- lining in lampholder		N
1.6 (4.10.4)	Protective impedance device		N
	Y1, Y2 capacitors according to IEC 60384-14 and their connection accordance with 8.6 of IEC60065		N
1.6 (4.11)	Electrical connections and current-carrying parts		P
1.6 (4.11.1)	Contact pressure		P
1.6 (4.11.2)	Screws:		P
	- Self-tapping screws		P
	- thread-cutting screws		N
1.6 (4.11.3)	Screw locking:		N
	- spring washer		N
	- rivets		N
1.6 (4.11.4)	Material of current-carrying parts	> 50% copper	P
1.6 (4.11.5)	No contact to wood or mounting surface	No wood	P
1.6 (4.11.6)	Electro-mechanical contact systems		N
	-test		N
1.6 (4.12)	Screws and connections (mechanical) and glands		N
1.6 (4.12.1)	Screw not made of soft metal		P
	Screws made of insulating material	Impair supplementary or reinforced insulation if replacement by a metal screw	N
	Screws used to provide earthing continuity		P



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	Fixing screws for ballasts and other components	at least one screw retaining the ballast will have a mechanical and electrical function.	N
	- not considered to be maintenance		N
	Screws of insulating material used in cord anchorages		N
	Torque test: torque (Nm); part .....	Fixed lampshade, 0.5Nm	P
	Torque test: torque (Nm); part .....	Fixed driver, 0.6Nm	P
	Torque test: torque (Nm); part .....	Earthing screw, 0.6Nm	P
	Torque test: torque (Nm); part .....	Fixed LED PCB, 0.5Nm	P
1.6 (4.12.2)	Screws transmitting contact pressure and screws		N
	Screw with diameter < 3 mm screw into metal		P
1.6 (4.12.3)	Not used		--
1.6 (4.12.4)	Screwed and other fixed connections between different parts of luminaires		N
	- locked connections; torque (Nm) .....		N
	- locked lampholder during lamp replacement; torque (Nm) .....		N
	- push-button switches; torque (Nm) .....	No such switches	N
1.6 (4.12.5)	Screwed glands; force (N) .....		P
1.6 (4.13)	Mechanical strength		P
1.6 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm) .....	0.2Nm, no damage	P
	- other parts; energy (Nm) .....	0.35Nm, no damage	P
	1) live parts not have become accessible		P
	2) effectiveness of insulating linings and barriers not have been impaired		P
	3) degree of protection	IP20	P
	4) possible to remove and to replace external covers		N
1.6 (4.13.2)	Metal parts enclosing live parts have		P

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	adequate mechanical strength		
1.6 (4.13.3)	Straight test finger with a force of 30 N	metal parts not touch live parts, not be excessively deformed and continue to meet the requirements of Section 11	P
1.6 (4.13.4)	Rough service luminaires	Normal service luminaires	N
	IP 54 or higher		N
	a) fixed rough service luminaires and portable rough service luminaires (not hand-held)		N
	b) hand-held luminaires		N
	c) luminaires delivered with a stand		N
	d) luminaires for temporary installations and suitable for mounting on a stand		N
1.6 (4.13.5)	Not used		--
1.6 (4.13.6)	Plug-ballast/transformers and mains socket-outlet-mounted luminaires		N
	Tumbling barrel test		N
	- sample does not exceed 250 g	50 times	N
	- sample exceeds 250 g	25 times	N
1.6 (4.14)	Suspensions, fixings and means of adjustment		N
1.6 (4.14.1)	Adequate factors of safety		P
	Test A) four times the weight.....:		P
	- suspended or fixed luminaire		N
	- external parts fixed to the luminaire		N
	Test B) for rigid suspension luminaires: torque 2.5 Nm.....:		N
	Test C) for rigid suspension brackets: bracket arm; force (N) .....		N
	a) for heavy-duty brackets		N
	b) for light-duty brackets		N
	D) for load track-mounted luminaires		N





EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	E) for clip-mounted luminaires:		N
1.6 (4.14.2)	Load to flexible cables:	No flexible cable	N
	mass (kg) .....		N
	stress in conductors (N/mm <sup>2</sup> ) .....		N
	Mass (kg) of semi-luminaires .....		N
	Bending moment (Nm) of semi-luminaires :		N
1.6 (4.14.3)	Adjusting devices:		N
	a) adjusting devices and means of adjustment		N
	- flexing test; number of cycles .....		N
	- not more than 50 % of the strands in a conductor are broken		N
	- insulation resistance and high-voltage tests afterwards		N
	b) luminaires with a means of adjustment intended to be installed within arm's reach		N
	c) luminaires intended to be mounted within arm's reach		N
1.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors	No such tubes	N
1.6 (4.14.5)	Guide pulleys	No such construction	N
1.6 (4.14.6)	Plug-ballast/transformers and mains socket-outlet-mounted luminaires	Not such unit	N
1.6 (4.15)	Flammable materials:		P
	- glow-wire test 650°C		P
	- spacing ≥ 30 mm		N
	- screen withstanding test of 13.3.1		N
	- screen dimensions	Spacing from heated parts min 3mm	N
	- no fiercely burning material		N
	- thermal protection		N
	- electronic circuits exempted		N
1.6 (4.15.2)	Luminaires made of thermoplastic material		N

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	a) construction		N
	b) temperature sensing control		N
	c) surface temperature		N
1.6 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	Lamp control gear		P
1.6 (4.16.1)	Lamp control gear shall spacing:		N
	- spacing 10 mm		N
	- spacing 35 mm		N
1.6 (4.16.2)	Thermal protection:	No such component	N
	- external		N
	-fixed position		N
	- class P" thermally protected ballast/transformer,		N
	- temperature declared thermally protected ballast/transformer,		N
1.6 (4.16.3)	Design to satisfy the test of 12.6		N
1.6 (4.17)	Drain holes	No drain holes	N
	Clearance at least 5 mm		N
1.6 (4.18)	Resistance to corrosion:		N
1.6 (4.18.1)	- more than IPX1 luminaires		N
1.6 (4.18.2)	- season cracking in copper		N
1.6 (4.18.3)	- corrosion of aluminium		N
1.6 (4.19)	Ignitors	No ignitors used	N
1.6 (4.20)	Rough service vibration .....	No such appliance	N
1.6 (4.21)	Protective shield		N
1.6 (4.21.1)	Shield fitted		N
	Shield of glass if tungsten halogen lamps		N
1.6 (4.21.2)	Particles from a shattering lamp not impair safety		N
1.6 (4.21.3)	No direct path		N
1.6 (4.21.4)	Impact test on shield		N

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)




EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	Glow-wire test on lamp compartment		N
1.6 (4.22)	Attachments to lamps		N
1.6 (4.23)	Semi-luminaires comply with Class II	No semi-luminaires	N
1.6 (4.24)	Photobiological hazards		N
1.6 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps		N
1.6 (4.24.2)	Retinal blue light hazard		N
	Luminaires with Ethr:		N
	a)Fixed luminaires	RG1	N
	-distance x m, borderline between RG1 and RG2		N
	-marking and instruction according 3.2.23		N
	b)Portable and handheld luminaires		N
	-marking according 3.2.23 if RG1 exceeded at 200mm according to IEC/TR 62778		N
	Portable luminaires for children IEC 60598-2-20 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200mm according to IEC/TR 62778		N
1.6 (4.25)	Mechanical hazard	No sharp points or edges	P
1.6 (4.26)	Short-circuit protection		N
1.6 (4.26.1)	uninsulated accessible SELV parts		N
1.6 (4.26.2)	Short circuit test		N
1.6 (4.26.3)	Test chain according to figure 29		N
1.6 (4.27)	Terminal blocks with integrated screwless earthing contacts		N
	Test according Annex V		N
	Pull test of terminal fixing (20N)		N
	After test, resistance<0.05 Ω		N
	Pull test of mechanical connection (50 N)		N
	After test, resistance < 0,05 Ω		N
	Voltage drop test, resistance < 0,05 Ω		N
1.6 (4.28)	Fixing of thermal sensing controls		N

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	Not plug-in or easily replaceable type		N
	Reliably kept in position		N
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N
	Not outside the luminaire enclosure		N
	Test of adhesive fixing:		N
	Max. temperature on adhesive material (°C)		N
	100 cycles between t min and t max		N
	Temperature sensing control still in position		N
1.6 (4.29)	Luminaire with non replaceable light source		N
	Not possible to replace light source		N
	Live part not accessible after parts have been opened by hand or tools		N
1.6 (4.30)	Luminaires with non-user replaceable light sources		P
	If protective cover provide protection against electric shock and marked with "caution, electric shock risk" symbol:		P
	Minimum two fixing means		P
1.6 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		P
1.6 (4.31.1)	SELV circuits		P
	Used SELV source		P
	Voltage ≤ ELV		P
	Insulating of SELV circuits from LV supply		P
	Insulating of SELV circuits from other non SELV circuits		P
	Insulating of SELV circuits from FELV		N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	Insulating of SELV circuits from other SELV circuits		P
	SELV circuits insulated from accessible parts according Table X.1		P
	Plugs not able to enter socket-outlets of other voltage systems		N
	Socket outlets does not admit plugs of other voltage systems		N
	Plugs and socket-outlets does not have protective conductor contact		N
1.6 (4.31.2)	FELV circuits		N
	Used FELV source		N
	Voltage $\leq$ ELV		N
	Insulating of FELV circuits from LV supply		N
	FELV circuits insulated from accessible parts according Table X.1		N
	Plugs not able to enter socket-outlets of other voltage systems		N
	Socket outlets does not admit plugs of other voltage systems		N
	Socket-outlets does not have protective conductor contact		N
1.6 (4.31.3)	Other circuits		N
	Other circuits insulated from accessible parts according Table X.1		N
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N
	- conductive parts are connected together		N
	- test according 7.2.3 of above		N
	- conductive part not cause an electric shock in case of an insulation fault		N
	- equipotential bonding in master/slave applications		N
	- master luminaire provided with terminal		N





EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict

	for accessible conductive parts of slave luminaires		
	- slave luminaire constructed as class I		N
1.6 (4.32)	Overvoltage protective devices		N
	Comply with IEC 61643-11		N
	External to control gear and connected to earth:		N
	- only in fixed luminaires		N
	- only connected to protective earth		N

1.7 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
	Working voltage (V) .....	100-240V~	P
	Voltage form	Sinusoidal [ <input checked="" type="checkbox"/> ] Non-sinusoidal [ <input type="checkbox"/> ]	P
	PTI	< 600 [ <input checked="" type="checkbox"/> ]    ≥ 600 [ <input type="checkbox"/> ]	P
	Impulse withstand category (normal category II) (category III annex U)		
	Rated pulse voltage (kV) .....		N
	(1) Current-carrying parts of different polarity: cr (mm); cl (mm) .....	Cr: 3.2mm, limit: 2.5mm Cl: 3.2mm, limit: 1.5mm	P
	(2) Current-carrying parts and accessible parts: cr (mm); cl (mm) .....	Cr: 6.6mm, limit: 2.5mm Cl: 6.6mm, limit: 1.5mm	P
	(3) Parts becoming live due to breakdown of basic insulation and metal parts: cr (mm); cl (mm) .....		N
	(4) Outer surface of cable where it is clamp and metal parts: cr (mm); cl (mm) .....		N
	(5)not used		N
	(6) Current-carrying parts and supporting surface: cr (mm); cl (mm) .....	Cr: 6.6mm, limit: 2.5mm Cl: 6.6mm, limit: 1.5mm	P

1.8 (7)	PROVISION FOR EARTHING		P
1.8 (7.2.1 + 7.2.3)	Accessible Metal parts		P



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict

	metal parts in contact with supporting surface		P
	Resistance < 0.5 $\Omega$ □	0.022 $\Omega$	P
	Self-tapping screws used		N
	Thread-forming screws		N
	Thread-forming screws used in a groove		N
	Earth marks contact first		P
1.8 (7.2.2 +7.2.3)	Earth continuity in joints etc.		P
1.8 (7.2.4)	Locking of clamping means		P
	Compliance with 4.7.3		P
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N
1.8 (7.2.5)	Earth terminal integral part of Connector socket		N
1.8 (7.2.6)	Earth terminal adjacent to mains terminals		P
1.8 (7.2.7)	Electrolytic corrosion of the earth terminal		P
1.8 (7.2.8)	Material of earth terminal		P
	Contact surface bare metal		P
1.8 (7.2.10)	Class II luminaire for looping-in		N
	Double or reinforced insulation to functional earth		N
1.8 (7.2.11)	Earthing core coloured green-yellow		P
	Length of earth conductor		P

<b>1.9 (14)</b>	<b>SCREW TERMINALS</b>		<b>N</b>
	Separately approved: component list	See annex 1	N
	Part of the luminaire		N

<b>1.9 (15)</b>	<b>SCREWLESS TERMINALS</b>		<b>N</b>
	Separately approved: component list	See annex 1	N
	Part of the luminaire		N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
<b>1.10 (5)</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		P
1.10 (5.2)	Supply connection and other external wiring		P
1.10 (5.2.1)	Means of connection.....: Supply plug		P
1.10 (5.2.2)	Type of supply cord.....: H05VV-F		P
	Nominal cross-section area (mm <sup>2</sup> )	3G0.75mm <sup>2</sup>	P
	Cables equal to IEC 60227 and IEC 60245		P
1.10 (5.2.3)	Type of attachment, X ,Y or Z		P
1.10 (5.2.5)	Type Z not connected to screws		P
1.10 (5.2.6)	Cable entries		N
	- suitable for introduction		N
	- adequate degree of protection		N
1.10 (5.2.7)	Cable entries through rigid material have rounded edges	Not cable entries	N
1.10 (5.2.8)	Insulating bushings in class II luminaires, in settable and adjustable luminaires or in portable luminaires other than those for wall mounting:		N
	- suitably fixed		N
	- material in bushings		N
	- material not likely to deteriorate		N
	- tubes or guard made of insulating material		N
1.10 (5.2.9)	Bushing locking of screw bushings	No such component	N
1.10 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P
1.10 (5.2.10.1)	Cord anchorage for type X attachment cord	Not such construction	N
	a) at least one part fixed		N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	b) types of cable		N
	c) no damaging of the cable		N
	d) whole cable can be mounted		N
	e) no touching of clamping screws		N
	f) metal screw not directly on cable		N
	g) replacement without special tool		N
	Glands not used as anchorage		N
	Labyrinth type anchorage		N
1.10 (5.2.10.2)	Adequate cord anchorages for type Y and type Z attachments	type Z	P
1.10 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N)	60N	P
	- torque test: torque (Nm)	0.25Nm	P
	- displacement $\leq 2$ mm	0.6mm	P
	- no movement of conductors		P
	- no damage of cable or cord		P
1.10 (5.2.11)	External wiring passing into luminaire		P
1.10 (5.2.12)	Looping-in terminals	Not looping-in appliance	N
1.10 (5.2.13)	Wire ends not tinned		N
	Wire ends tinned: no cold flow		N
1.10 (5.2.14)	Mains plug same protection		P
	Class III luminaire plug		N
1.10 (5.2.16)	Appliance inlets (IEC 60320)	No appliance inlet	N
	Appliance couplers of class II type		N
1.10 (5.2.17)	No standardized in interconnecting cables assembled		N
1.10 (5.2.18)	Used plug in accordance with		P
	- IEC 60083		N
	- other standard		P
1.10 (5.3)	Internal wiring		P



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
1.10 (5.3.1)	Internal wiring of suitable size and type	22AWG	P
	Through wiring		N
	- not delivered/ mounting instruction		N
	- factory assembled		N
	- socket outlet loaded (A).....:		N
	- temperatures.....:		N
	Green-yellow for earth only		P
1.10 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N
	Cross-Sectional area (mm <sup>2</sup> )		N
	Insulation thickness		N
	Extra insulation added where necessary		N
1.10 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limited device		N
	Adequate cross-section area and insulation thickness		N
1.10 (5.3.1.3)	Double or reinforced insulation for class II		N
1.10 (5.3.1.4)	Conductors without insulation	Not used	N
1.10 (5.3.1.5)	SELV current-carrying parts		N
1.10 (5.3.1.6)	Insulation thickness other than PVC or rubber		N
1.10 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		P
	Joints, raising/lowering devices		N
	Telescopic tubes etc.		N
	No twisting over 360 <sup>0</sup>		P
1.10 (5.3.3)	Insulating bushings on class II luminaires, in settable and adjustable luminaires, or in portable luminaires other than those for wall mounting,		N
	- suitable fixed		N
	- material in bushings		N
	- material not likely to deteriorate		N

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict

	- cables with protective sheath		N
1.10 (5.3.4)	Joints and Junctions effectively insulated		N
1.10 (5.3.5)	Strain on internal wiring		N
1.10 (5.3.6)	Wire carriers		N
1.10 (5.3.7)	Wire ends not tinned		N
	Wire ends tinned: no cold flow		N

<b>1.11 (8)</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		P
1.11 (8.2.1)	Live parts not accessible with standard test finger		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable and adjustable luminaires		N
	Basic insulated parts not accessible with $\varnothing 50\text{mm}$ probe from outside, within arms reach, on wall-mounted luminaires		P
	Lamp and starholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N
	Basic insulation only accessible under lamp or starter replacement		N
	Double-ended tungsten filament lamp		N
	Insulation lacquer not reliable		P
	Double-ended high pressure discharge lamp		N
	Relevant warming according to 3.2.18 fitted to the luminaire		N
1.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position	Fixed luminaire	N
1.11 (8.2.3 a)	Class II luminaire:		N
	- basic insulated metal parts not accessible during starter or lamp replacement		N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict

	- basic insulated not accessible other than during starter or lamp replacement		N
	- glass protective shields not used as supplementary insulation	No such parts	N
1.11 (8.2.3b)	BC lampholder of metal in class I luminaires shall be earthed		N
1.11 (8.2.3c)	Class III luminaires with expose SELV parts:		N
	Ordinary luminaire :		N
	- touch current		N
	- no-load voltage		N
	- other than ordinary luminaire:		N
	- nominal voltage		N
1.11 (8.2.4)	Portable luminaire:	Fixed luminaire	N
	- protection independent of supporting surface		N
	- terminal block completely covered		N
1.11 (8.2.5)	Compliance with the standard test finger or relevant probe		P
1.11 (8.2.6)	Covers reliably secured		P
1.11 (8.2.7)	Discharging of capacitors >0.5 $\mu$ F	0V after 1min	P
	Portable plug connected luminaire with capacitor		N
	Discharge device on or within capacitor		N
	Discharge device mounted separately		N

<b>1.12 (12)</b>	<b>ENDURANCE TEST AND THERMAL TEST</b>		P
1.12 (12.3)	Endurance test:		P
	- mounting-position .....	Normal installation	P
	- test temperature ( $^{\circ}$ C) .....	35 $^{\circ}$ C	P
	- total duration (h) .....	240hrs. Totally 10 cycles, each 24h	P



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	- supply voltage: Un factor; calculated voltage (V) .....	1.1x240V	P
	- lamp used .....	LED lamp	P
1.12 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N
	- marking legible		P
	- no cracks, deformation etc.		P
1.12 (12.4)	Thermal test (normal operation)	(see table 12.4 )	P
1.12 (12.5)	Thermal test (abnormal operation)		N
	Short-circuit of starter contacts		N
	Lamps removed and not replaced		N
1.12 (12.6)	Thermal test (failed lamp control gear condition):		N
1.12 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		N
	- case of abnormal conditions .....		N
	- electronic ballast		N
	- measured winding temperature (°C): at 1.1 Un		N
	- measured mounting surface temperature (°C): at 1.1 Un .....		N
	- calculated mounting surface temperature(°C)		N
	- track-mounted luminaires		N
1.12 (12.6.2)	Temperature sensing control:		N
	- manual reset cut-out		N
	- auto reset cut-out		N
	- track-mounted luminaires		N
1.12 (12.7)	Thermal test (failed ballast or transformer in plastic luminaires):		N





EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
1.12 (12.7.1)	Luminaire without temperature sensing control		N
1.12 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N
	Test method 12.7.1.1 or Annex V		N
	Test according to 12.7.1.1:		N
	- case of abnormal conditions		N
	- Ballast failure at supply voltage (V)		N
	- Components retained in place after the test		N
	- Test with standard test finger after the test		N
	Test according to Annex V:		N
	- case of abnormal conditions		N
	- measured winding temperature (°C): at 1.1 Un.. :		N
	- measured temperature of fixing point/exposed part (°C): at 1.1Un.....:		N
	- calculated temperature of fixing point/exposed part (°C) .....		N
	Ball-pressure test:		N
	- part tested; temperature (°C)..... :		N
	- part tested; temperature (°C)..... :		N
1.12 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		--
	- case of abnormal conditions		N
	- measured winding temperature (°C): at 1.1 Un.. .....		N
	- measured temperature of fixing point/exposed part (°C): at 1.1 Un..... :		N
	- calculated temperature of fixing point/exposed part (°C) .....		N
	Ball-pressure test:		N
	- part tested; temperature (°C)..... :		N

**Dongguan Precise Testing & Certification Corp., Ltd.**

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict

	- part tested; temperature (°C)..... :		N
1.12 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N
	- case of abnormal conditions		N
	- Components retained in place after the test		N
	- Test with standard test finger after the test		N
1.12 (12.7.2)	Luminaire with temperature sensing control		N
	- thermal link		N
	- manual reset cut-out		N
	- auto reset cut-out		N
	- case of abnormal conditions		N
	- highest measured temperature of fixing point/exposed part (°C):..... :		N
	Ball-pressure test:		N
	- part tested; temperature (°C)..... :		N
	- part tested; temperature (°C)..... :		N

<b>1.13 (9)</b>	<b>RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE</b>		<b>P</b>
1.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP .....	IP20	P
	- mounting position during test .....		N
	- fixing screws tightened; torque (Nm) .....		N
	- tests according to clauses .....		P
	- electric strength		P
	a) no deposit in dust-proof luminaire		N
	b) no talcum in dust-tight luminaire		N
	c) no trace of water on current-carrying parts or SELV parts or where it could become a hazard		N
	d) i) For luminaires without drain holes – no water entry		N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	d) ii) For luminaires with drain holes – no hazardous water entry		N
	e) no water in watertight luminaire		N
	f ) no contact with live parts (IP 2X)		P
	f) no entry into enclosure (IP 3X and IP 4X)		N
	f) no contact with live parts (IP3X and IP4X)		N
	g) no trace of water on part of lamp requiring protection from splashing water		N
	h) no damage of protective shield or glass envelope		N
1.13 (9.3)	Humidity test 48h	Relative humidity 93%, temperature 25°C, 48h, followed by hi-pot test	P

<b>1.14 (10)</b>	<b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>		P
1.14 (10.2.1)	Insulation resistance test:		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø.....:		P
	Insulation resistance:		P
	SELV:		--
	- between current-carrying parts of different polarity..... :		N
	- between current-carrying parts and mounting surface .....		N
	- between current-carrying parts and metal parts of the luminaire .....	> 100M Ω , limit: 1 M Ω	P
	Other than SELV:		P
	- between live parts of different polarity .....	> 100M Ω , limit: 2 M Ω	P
	- between live parts and mounting surface.:	> 100M Ω , limit: 2 M Ω	P
	- between live parts and accessible parts.. :	> 100M Ω , limit: 2 M Ω	P
	- between live parts of different polarity through action of a switch .....		N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict

1.14 (10.2.2)	Electric strength test:		P
	Dummy lamp		N
	Luminaires with ignitors after 24 h test		N
	Luminaires with manual ignitors		N
	Test voltage (V):		P
	SELV:		--
	- between current-carrying parts of different polarity..... :		N
	- between current-carrying parts and mounting surface ..... :		N
	- between current-carrying parts and metal parts of the luminaire ..... :	500Vac, no breakdown	P
	Other than SELV:		--
	- between live parts of different polarity .....:	1480Vac, no breakdown	P
	- between live parts and mounting surface.....:	1480Vac, no breakdown	P
	- between live parts and accessible parts...:	1480Vac, no breakdown	P
	- between live parts of different polarity through action of a switch ..... :		N
1.14 (10.3)	Touch current (mA) .....	protective conductor current : 0.07mA limit: 3.5mA	P
	Protective conductor current (mA) .....		N

<b>1.15 (13)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		P
1.15 (13.2.1)	Ball-pressure test:		P
	- part tested; temperature (°C) .....	Plastic cover, 125°C, 0.9mm	P
	- part tested; temperature (°C) .....	Nipple terminal: 125°C, 1.4mm	P
1.15 (13.3.1)	Needle flame test (10 s):		N
	- part tested .....		N
1.15 (13.3.2)	Glow-wire test:		P



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict
	- part tested .....	Plastic cover, 650°C, No burning	P
	- part tested .....	Nipple terminal, 750°C, Extinguish after 1.8s, Flame high: 14mm	P
1.15 (13.4.2)	Tracking test: part tested .....		N
<b>Annex A</b>	<b>TEST TO ESTABLISH WHETHER A CONDUCTIVE PART MAY CAUSE AN ELECTRIC SHOCK</b>		P
A.2	Voltage not exceed 35 V a.c. peak or 60 V ripple free d.c.		P
A.3	Touch-current not exceed:		N
	- for a.c.: 0,7 mA (peak);		N
	- for d.c.: 2,0 mA		N
<b>Annex B</b>	<b>TEST LAMP</b>		N
<b>Annex C</b>	<b>ABNORMAL CIRCUIT CONDITIONS</b>		N
	a) Short-circuit of starter contacts		N
	b) Lamp rectification		N
	c) Lamps removed and not replaced		N
	d) One electrode of lamp open-circuited		N
	e) Lamp will not start, but both electrodes are intact		N
	f) Blockage of the motor(s) contained in the luminaire		N
<b>Annex D</b>	<b>DRAUGHT-PROOF ENCLOSURE</b>		N
<b>Annex E</b>	<b>DETERMINATION OF WINDING TEMPERATURE RISES BY THE INCREASE—IN-RESISTANCE METHOD</b>		N
<b>Annex F</b>	<b>TEST FOR RESISTANCE TO STRESS CORROSION OF COPPER AND COPPER ALLOYS</b>		N



EN 60598-2-1			
Clause	Requirement - Test	Result - Remark	Verdict

<b>Annex G</b>	<b>MEASUREMENT OF TOUCH CURRENT AND PROTECTIVE CONDUCTOR CURRENT</b>		P
----------------	--	--	---

	<b>CENELEC COMMON MODIFICATIONS (EN)</b>		--
<b>3</b>	<b>MARKING</b>		--
	Adequate warning on the package		--
<b>5</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		--
5.2.1	Connecting leads		N
	- without a means for connection to the supply		N
	- terminal block specified		N
	- relevant information provided		N
	- compliance with 4.6, 4.7.1, 4.7.2, 4.10.1, 11.2,12 and 13.2 of Part 1		N
5.2.2	Cables equal to HD21 S2 or HD22 S2		N

<b>ZB</b>	<b>ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)</b>		N
3.3	DK: power supply cord with label		N
	IT: warning label on Class 0 luminaire		N
4.5.1	DK: socket-outlets		N
5.2.1	CY, DK, FI, SE, GB: type of plug		N

<b>ZC</b>	<b>ANNEX ZC, NATIONAL DEVIATIONS (EN)</b>		N
4&5	FR: Shuttered socket-outlets 10/16A		N
13.3	GB: Requirements according to United Kingdom Building Regulation		N
13.3.2	FR: Glow-wire test 850°C alt. 750°C for luminaries in premises open to public or 960°C for luminaries in emergency exits		N



Tables

ANNEX 1: components						P
object/part No.	Code	manufacturer/trademark	type/model	technical data	standard	mark(s) of conformity
Plastic cover	B	Bayer Materialscience Ag	6255 + (z)	V-0, 125°C, PC	UL94	UL E41613
Supply plug	B	Ningbo Qiaopu Electric Co., Ltd.	D02	250V, 10A	EN 50075	VDE 40002875
Supply cords	B	Ningbo Qiaopu Electric Co., Ltd.	H05VV-F	3G0.75mm2	EN 50525-2-11	VDE 40035976
Nipple terminal	B	TEIJIN CHEMICALS LT	LN-2250	120 °C	UL94 UL746	UL E50075
Output wire of LED driver(input wire of LED module)	B	Shenzhen Jiahuida Electronics Co Ltd	3239	22AWG, Maximum 200 deg C, 60000 Vdc	UL 758	UL E361915
LED PCB	B	SHEZHEN BOMINXING ELECTRONIC CO., LTD	BMX-03	V-0, 130°C	ANSI/UL 94	UL E226252
LED Bead	B	Shenzhen Tongfang Photoelectric Technology Co., Ltd	Z100-TY	IF: 1750mA Vr: 50V P:59.5W	IEC 62471	Test with appliance
LED Driver	B	Zhongshan Done Electronics Technology Co., Ltd	ADS-50W1A5-MEP	Input: 100-240V~, 50/60Hz, 0.68A, Output: 20-36Vdc, 1500Ma ta40°C, tc80°C	EN 61347-1; EN 61347-2-13	CE

The codes above have the following meaning:

- A – The component is replaceable with another one, also certified, with equivalent characteristics
- B – The component is replaceable if authorized by the test house
- C – Integrated component tested together with the appliance
- D – Alternative component

ANNEX 2: temperature measurements, thermal tests of Section 12		P
Type reference .....	B0801-XX-300-ZZZ	P
Lamp used .....	LED lamp	P



Tables

	Lamp control gear used.....:	LED lamp controlgear	N
	Mounting position of luminaire.....:	See user manual	P
	Supply wattage (W) .....		P
	Supply current (A) .....		P
	Calculated power factor.....:		P
	Table: measured temperatures corrected for $t_a = 25^\circ\text{C}$ :		P
	- abnormal operating mode.....:		N
	- test 1: rated voltage.....:	240V	P
	- test 2: 1,06 times rated voltage or 1,05 times Rated wattage .....	1.06x240V~	P
	- test 3: Load on wiring to socket-outlet, 1.06 times voltage or 1,05 times wattage .....	--	N
	- test 4: 1,1 times rated voltage or 1,05 times Rated wattage .....		N
	Through wiring or looping-in wiring loaded by a current of A during the test .....		N

Temperature( $^\circ\text{C}$ ) of part	Clause 12.4 – normal				Clause 12.5 – abnormal	
	Test 1	Test 2	Test 3	Limits	Test 4	Limit
Plastic cover, inside	68.6	69.3	--	125	--	--
Supply cord	30.2	32.2	--	90	--	--
Nipple terminal	46.5	53.9	--	110	--	--
Input wire of LED driver	47.6	51.4	--	120	--	--
Output wire of LED driver near LED module	76.7	78.9	--	200	--	--
Tc of LED driver	75.8	76.3	--	80	--	--
LED PCB	84.3	89.3	--	130	--	--
Light surface(10cm)	28.3	29.1	--	90	--	--
Mounting surface	32.6	33.4	--	90	--	--
Ambient	25.0	25.0	--	--	--	--

	<b>ANNEX 3: screw terminals (part of the luminaire)</b>	--
<b>14</b>	<b>SCREW TERMINALS</b>	--
14.2	Type of terminal.....:	--





Tables

	Rated current (A) .....		--
14.3.2.1	One or more conductors		N
14.3.2.2	Special preparation		N
14.3.2.3	Terminal size		N
	Cross-sectional area (mm <sup>2</sup> ) .....		N
14.3.3	Conductor space (mm).....		N
14.4	Mechanical tests		N
14.4.1	Minimum distance		N
14.4.2	Cannot slip out		N
14.4.3	Special preparation		N
14.4.4	Nominal diameter of thread (metric ISO thread).....		N
	External wiring		N
	No soft metal		N
14.4.5	Corrosion		N
14.4.6	Nominal diameter of thread (mm) .....		N
	Torque (Nm) .....		N
14.4.7	Between metal surfaces		N
	Lug terminal		N
	Mantle terminal		N
	Pull test; pull (N) .....		N
14.4.8	Without undue damage		N

	<b>ANNEX 4: screwless terminals (part of the luminaire)</b>		--
<b>15</b>	<b>SCREWLESS TERMINALS</b>		--
15.2	Type of terminal .....		—
	Rated current (A) .....		—
15.3.1	Material		N
15.3.2	Clamping		N
15.3.3	Stop		N
15.3.4	Unprepared conductors		N
15.3.5	Pressure on insulating material		N
15.3.6	Clear connection method		N



Tables

15.3.7	Clamping independently		N							
15.3.8	Fixed in position		N							
15.3.10	Conductor size		N							
	Type of conductor		N							
15.5.1	Terminals internal wiring		N							
15.5.1.1	Pull test spring-type terminals (4 N, 4 samples)		N							
15.5.1.2	Pull test pin or tab terminals (4 N, 4 samples)		N							
	Insertion force not exceeding 50 N		N							
15.5.2	Permanent connections: pull-off test (20 N)		N							
15.6	Electrical tests		--							
	Voltage drop (mV) after 1 h (4 samples)..... :		N							
	Voltage drop of two inseparable joints		N							
	Number of cycles .....		N							
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N							
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N							
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples) .....		N							
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples) .....		N							
15.7	Terminals external wiring		N							
	Terminal size and rating		N							
15.8.1	Pull test spring-type terminals (4 samples); pull (N)		N							
	Pull test pin or tab terminals (4 samples); pull (N)		N							
15.9	Contact resistance test		N							
	Voltage drop (mV) after 1 h		N							
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Voltage drop of two inseparable joints									
	Voltage drop after 10th alt. 25th cycle									



Tables

	Max. allowed voltage drop (mV).....: —									
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Voltage drop after 50th alt. 100th cycle									
	Max. allowed voltage drop (mV).....: —									
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Continued ageing: voltage drop after 10th alt. 25th cycle									
	Max. allowed voltage drop (mV).....: —									
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Continued ageing: voltage drop after 50th alt. 100th cycle									
	Max. allowed voltage drop (mV).....: —									
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										

	<b>ANNEX 5: EMF test result according to EN 62493:2010</b>				P
4.2.d	<b>MEASUREMENT RESULTS</b>				P
	Measuring with "Van der Hoofden" test head				P
	EUT operation model: <input checked="" type="checkbox"/> Normal operation <input type="checkbox"/> Other operation:				P
	Voltage:	100-240V~	Frequency:	50/60Hz	--
	Temperature:	25°C	Humidity:	55% R.H.	--
	Location of EuT	Measuring distance (cm)	Result (F)	Limit (F)	Verdict
	B0801-XX-300-ZZZ	50	0.0354	0.85	P



**Attachment No.1**  
**Summary of requirements and test clause of:**  
**EN 62031: 2008+A1: 2013+A2: 2015: LED modules for general lighting - Safety specifications**

6	Classification		---
	Built-in.....:		N
	Independent.....:		N
	Integral.....:		P
7	Marking		N
7.1	Mandatory marking for built-in or independent modules		N
7.2	Location of marking		N
7.3	Durability and legibility of marking		N
8	Terminals		N
9	Provisions for protective earthing		N
10	Protection against accidental contact with live parts		N
11	Moisture resistance and insulation		P
12	Electric strength		P
13	Fault conditions		P
13.1	Fault conditions according to IEC 61347-1, Clause 14		P
13.2	Overpower condition	No damage	P
14	Conformity testing during manufacture		N
15	Construction		P
	Non Wood, cotton, silk, paper and similar fibrous material used as insulation.		P
16	Creepage distances and clearances		N
17	Screws, current-carrying parts and connections		N
18	Resistance to heat, fire and tracking		N
19	Resistance to corrosion		N
20	Information for luminaire design		N
21	Heat management		N
22	Photobiological safety		P
22.1	UV radiation		P
22.2	Blue light hazard		P
22.3	Infrared radiation		N



Report No.: PTC802139160815-LD01

Annex A	Test		--
Annex C	Conformity testing during manufacture		--
Annex D	Information for luminaire design		--



**Attachment No.2**

**Summary of requirements and test clause of:  
EN 62471: 2008: Photobiological safety of lamps and lamp systems**

<b>4</b>	<b>EXPOSURE LIMITS (EL'S)</b>		<b>---</b>
4.2	Specific factors involved in the determination and application of retinal exposure limits		P
4.2.1	Pupil diameter		P
4.2.2	Angular subtense of source and measurement field-of-view		P
4.3	Hazard exposure limits		P
4.3.1	Actinic UV hazard exposure limit for the skin and eye		N
4.3.2	Near-UV hazard exposure limit for the eye		N
4.3.3	Retinal blue light hazard exposure limit		P
4.3.4	Retinal blue light hazard exposure limit - small source		P
4.3.5	Retinal thermal hazard exposure limit		N
4.3.6	Retinal thermal hazard exposure limit – weak visual stimulus		P
4.3.7	Infrared radiation hazard exposure limits for the eye		N
4.3.8	Thermal hazard exposure limit for the skin		P
<b>5</b>	<b>MEASUREMENT OF LAMPS AND LAMP SYSTEMS</b>		<b>P</b>
5.1	Measurement conditions		P
5.1.1	Lamp ageing (seasoning)		P
5.1.2	Test environment		P
5.1.3	Extraneous radiation		P
5.1.4	Lamp operation		P
5.1.5	Lamp system operation		P
5.2	Measurement procedure		P
5.2.1	Irradiance measurements		P
5.2.2	Radiance measurements		P
5.2.3	Measurement of source size		P
5.2.4	Pulse width measurement for pulsed sources		N
5.3	Analysis methods		P
5.3.1	Weighting curve interpolations		P
5.3.2	Calculations		P



5.3.3	Measurement uncertainty		P
<b>6</b>	<b>LAMP CLASSIFICATION</b>		<b>P</b>
6.1	Continuous wave lamps		P
6.1.1	Exempt group		P
6.1.2	Risk Group 1 (Low-Risk)		N
6.1.3	Risk Group 2 (Moderate-Risk)		N
6.1.4	Risk Group 3 (High-Risk)		N
6.2	Pulsed lamps		N

<b>Annex A</b>	<b>SUMMARY OF BIOLOGICAL EFFECTS</b>	--
----------------	--------------------------------------	----

<b>Annex B</b>	<b>MEASUREMENT METHOD</b>	--
----------------	---------------------------	----

<b>Annex C</b>	<b>UNCERTAINTY ANALYSIS</b>	--
----------------	-----------------------------	----

<b>Annex D</b>	<b>GENERAL REFERENCES</b>	--
----------------	---------------------------	----


Table 6.1		Emission limits for risk groups of continuous wave lamps(based on EU directive 2006/25/EC)								P
Risk	Action spectrum	Symbol	Units	Emission Measurement						
				Exempt		Low risk		Mod risk		
				Limit	Result	Limit	Result	Limit	Result	
Actinic UV	SUV( $\lambda$ )	$E_s$	$W \cdot m^{-2}$	0,001	$1.26 \times 10^{-4}$	-	-	-	-	
Near UV		$E_{UVA}$	$W \cdot m^{-2}$	0.33	$1.31 \times 10^{-4}$	-	-	-	-	
Blue light	B( $\lambda$ )	$L_B$	$\frac{W \cdot m^{-2}}{sr}$	100	$0.56 \times 10^2$	10000	-	4000000	-	
Blue light, small source	B( $\lambda$ )	$E_B$	$W \cdot m^{-2}$	0.01*	-	1,0	-	400	-	
Retinal thermal	R( $\lambda$ )	$L_R$	$\frac{W \cdot m^{-2}}{sr}$	28000/ $\alpha$	$5.95 \times 10^3$	28000/ $\alpha$	-	71000/ $\alpha$	-	
Retinal thermal, weak visual stimulus**	R( $\lambda$ )	$L_{IR}$	$\frac{W \cdot m^{-2}}{sr}$	545000 $0.0017 \leq \alpha$ $\leq 0.011$	-	-	-	-	-	



Table 6.1	Emission limits for risk groups of continuous wave lamps(based on EU directive 2006/25/EC)								P
				$6000/\alpha$ $0.011 \leq \alpha$ $\leq 0.1$	-	-	-	-	-
IR radiation, eye		$E_{IR}$	$W \cdot m^{-2}$	100	0.0056	570	-	3200	-
<p>* Small source defined as one with <math>\alpha &lt; 0,011</math> radian. Averaging field of view at 10000 s is 0,1 radian.            ** Involves evaluation of non-GLS source            Note: The action functions: see Table 4.1 and Table 4.2            The applicable aperture diameters: see 4.2.1            The limitations for the angular subtenses: see 4.2.2            The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5</p>									



### ANNEX A Photo

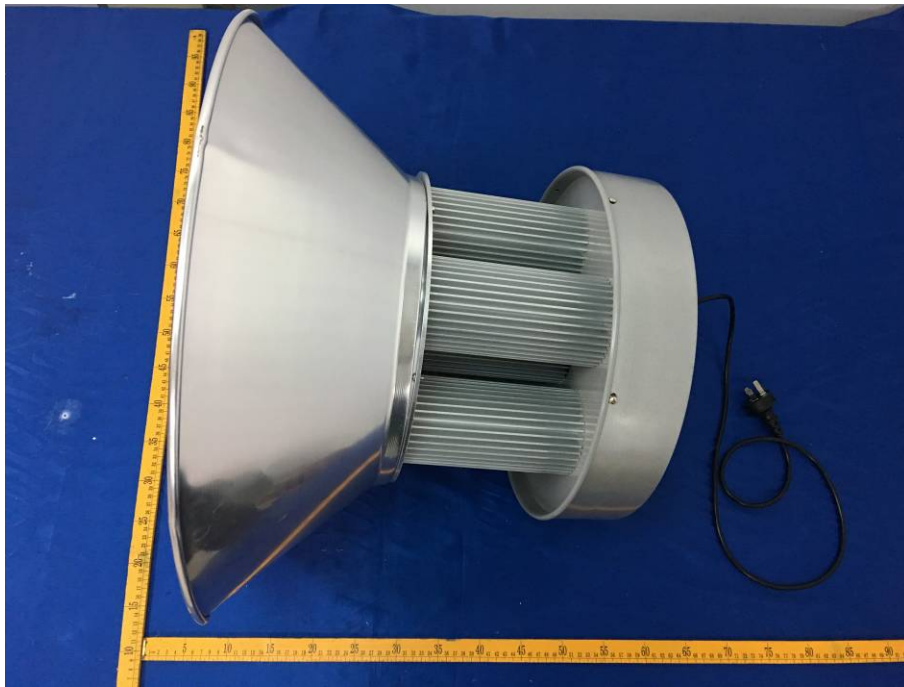

**General view – 1(model: B0801-XX-300-ZZZ)**

**Remark: All models have the same appearance photo like above view except their size and number of LED module.**



**Top view – 2**

**ANNEX A Photo**



**Bottom view – 3**



**Internal view – 4**