



CE LVD TEST REPORT

For
LED bulb

Model No.: BQP01 、 BQP02 、 BQP03 、 BSD01 、 BSD02 、 BLZ01

Applicant : ZhongShan Berdis Lighting Co.,LTD.

5F, No.10-12, South 2nd Lane, Huasheng East Road, Caosan Industrial
Park,Guzhen Town,Zhongshan City, Guangdong Province, China

Manufacturer : ZhongShan Berdis Lighting Co.,LTD.

5F, No.10-12, South 2nd Lane, Huasheng East Road, Caosan Industrial
Park,Guzhen Town,Zhongshan City, Guangdong Province, China

Issued By : Global-Standard Testing Service Co., Ltd.

Room 1911-1914, Noble Plaza, Qian Jin 1st Road, Bao An
District,Shenzhen, Guangdong, China.

Tel : +86 755 33863599

Email : market@gstslab.com

Report Number : GST1403240148S

Issued Date : March 26, 2014

Date of Report : March 26, 2014

Note:

1. The test data and result is based on the tested sample only.
2. Please verify information in the report on GST web: www.gstslab.com through report number.
3. All rights reserve, the pirate edition investigates necessarily! This report shall not be reproduced unless under the authority of Global-Standard Testing Service Co., Ltd.

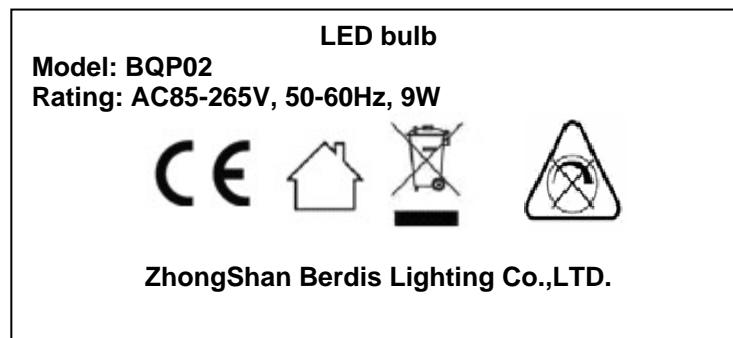
TEST REPORT EN 62560:2012 Self-ballasted LED-lamps for general lighting services by voltage > 50 V – Safety specifications	
Report reference No.:	GST1403240148S
Testing laboratory	Global-Standard Testing Service Co., Ltd.
Location.....:	Room 1911-1914, Noble Plaza, Qian Jin 1st Road, Bao An District, Shenzhen, Guangdong, China.
Applicant.....:	ZhongShan Berdis Lighting Co.,LTD.
Address:.....:	5F, No.10-12, South 2nd Lane, Huasheng East Road, Caosan Industrial Park,Guzhen Town,Zhongshan City, Guangdong Province, China
Manufacturer.....:	ZhongShan Berdis Lighting Co.,LTD.
Address:.....:	5F, No.10-12, South 2nd Lane, Huasheng East Road, Caosan Industrial Park,Guzhen Town,Zhongshan City, Guangdong Province, China
Standards.....:	EN 62560:2012 EN 60061-1:1993 EN 62031:2008 EN 61347-1:2008 + A1:2011 EN 61347-2-13:2006 EN 62471:2008 EN 62493:2010
Procedure deviation.....:	N/A
Non-standard test method.....:	N/A
Type of test equipment	LED bulb
Trade mark.....:	Berdis
Model/Type designation.....:	BQP01、 BQP02、 BQP03、 BSD01、 BSD02、 BLZ01
Rating.....:	AC85-265V, 50-60Hz, 9W
Copyright blank test report:	Global-Standard Testing Service Co., Ltd.
Test item particulars:	--
Operating Condition	Continuous
Class of equipment	Class II equipment
Protection against ingress of water	IP20

<p>General remarks:</p>	
<p>“(see remark #)” refers to a remark appended to the report.</p> <p>“(see appended table)” refers to a table appended to the report.</p> <p>Throughout this report a comma is used as the decimal separator.</p> <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>Until otherwise specified, all tests are done under normal ambient condition $25^{\circ}\text{C}\pm 10^{\circ}\text{C}$, Max RH: 75% and air pressure of 860 mbar to 1060 mbar.</p>	<p>Attached with:</p> <p>Attachment - A. Photo Documentation</p>
<p>Brief description of the test sample:</p> <ol style="list-style-type: none"> 1. The equipment with models BQP01、BQP02、BQP03、BSD01、BSD02、BLZ01 are class II LED LAMP used for Self-ballasted lamps for general lighting services 2. All the models are the same construction except cap head, LED color and LED numbers. The control gear inside lamp with different out voltage have different parameters of secondary components. 3. Model BQP02 was selected as representative sample . 4. The European standard EN 62471 for LED laser product requirement has considered. 5. Clauses 8,10, 11, 12, 14, 16, 17, 18, 19 and 20 of the European standard test EN61347-2-13 used in conjunction with EN 61347-1 for lamp control gear inside BQP02 have been consideration. 6. The Safety specifications of LED modules for general lighting was evaluated with reference to EN 62031. 7. The European standard EN 62493 for requirement has considered. 	



Possible test case verdicts : test case does not apply to the test object test object does meet the requirement test object does not meet the requirement	N(/A.) P(ass) F(ail)
Name and address of the testing laboratory : Global-Standard Testing Service Co., Ltd. Room 1911-1914, Noble Plaza, Qian Jin 1st Road, Bao An District, Shenzhen, Guangdong, China.	
Tested by : _____ Signature _____ Suki Zhao/ Engineer Name/title	<u>March 26, 2014</u> Date
Witnessed by: _____ Signature _____ Tim.Sun / project Engineer Name/title	<u>March 26, 2014</u> Date
Approved by : _____ Signature _____ Kevin Liu / Manager Name/title	<u>March 26, 2014</u> Date

Copy of marking plate



Note: Due to similarity of the labels, only above label was listed.


- The above copy of marking plate as an example, All the other models will have the same marking plate except the model name and input rating only and other parameter

-The above markings are the minimum requirements required by the safety standard. For the final productions samples, the additional markings which do not give rise to misunderstanding may be added.

- the height of WEEE directive mark is at least 7mm height.

EN 62560			
Clause	Requirement	Result - Remark	Verd.

4	GENERAL REQUIREMENTS		P
4.1	The lamp shall be so designed and constructed that in normal use cause no danger to the user.		P
4.2	Self-ballasted LED-Lamp are non-repairable.		P

5.	MARKING		P
5.1	Mandatory marking	ZhongShan Berdis Lighting Co.,LTD.	P
	- mark of origin		P
	- rated supply voltage (V).....	AC85-265V	P
	- rated wattage (W)	See label	P
	- rated frequency (Hz).....	50-60Hz	P
5.2	Addition marking	See label	P
	- burning position		N
	- rated current (A).....		P
	- weight significantly higher	Warning:increased weight of lamp may reduce the mechanical stability of certain luminaires and lampholders and may impair contact making and lanp retention (inthe instruction manual)	P
	- special conditions or restrictions		N
	Not suitable for dimming;symbol used 		P
	- eye protection	The products are classified as exempt group according to IEC 62471:2006.	P
5.3	Marking durable and legible		P
	rubbing 15 s water, 15 s petroleum; marking legible		P
Addition:	Position of the marking	On the body	P
	Language of instructions	English	P
	Suitability for use indoors		P
	Wireways smooth and free from sharp edges		P

EN 62560			
Clause	Requirement – Test	Result - Remark	Verdict

6	INTERCHANGEABILITY		P
6.1	Cap interchangeability in accordance with IEC 60061-1		P
	Gauge in accordance with IEC 60061-3		P
6.2	Bending moment, axial pull and mass		P
	Bending moment imparted by the lamp at the lampholder		P
	Lamp construction withstands axial pull (N)	40N	P
	Mass not exceeding value tabel 2 (kg)	275g	P

7.	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		P
	Internal, basic insulated or live metal parts not accessible		P
	Tested with a test finger with a force of 10 N		P
	Compliance checked with appropriate gauges		N
Addition:	Live parts not accessible		P
	Protection in any position		P
	Insulation lacquer not reliable		P
	Class II luminaire:		P
	- insulation-encased, reinforced insulation		P
	- glass protective shields not used as supplementary insulation		P
	Covers have adequate strength		P
	Covers reliably secured		P
	Portable plug connected luminaire with capacitor		N

8.	INSULATION RESISTANCE AND ELECTRIC STRENGTH AFTER HUMIDITY TREATMENT		P
8.1	Insulation resistance and electric strength shall be adequate between live parts of the lamp and accessible parts of the lamp.		P
8.2	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (MΩ):		P
	≥ 4 MΩ for double or reinforced insulation :	200 MΩ.	P
8.3	Immediately after clause 8.2 electric strength test for 1 min		P

EN 62560			
Clause	Requirement – Test	Result - Remark	Verdict
	Double or reinforced insulation, 4U + 2000 V	3000	P
	No flashover or breakdown		P

9.	MECHANICAL STRENGTH		P
	Torsion resistance of unused lamps		
9.1	Torque test		P
	B 15 d Cap 1,15 Nm		N
	B 22 d Cap 3,0 Nm		N
	E 11 Cap 0,8 Nm		N
	E 12 Cap 0,8 Nm		N
	GU10 Cap 1.15Nn		N
	E 14 Cap 1,15 Nm		N
	E 27 Cap 1,5 Nm		P
	Cap 3,0 Nm		N
	GX 53 Cap 3,0 Nm	under consideration	N
9.2	Torsion resistance of lamps after a defined time of usage		N
	Torsion resistance of used lamp	under consideration.	N
9.3	Repetition of clause 8		P
	Clause 8 shall comply after the mechanical strength test.		P
Addition:	Lampholders		N
	Mounting brackets for Edison screw or bayonet-capped lampholders are subjected to testing for 1min, to the following bending moments:		N
	Locked connections:		N
	- fixed arms; torque (Nm).....:		N
	- lampholder; torque (Nm).....:		N
	- push-button switches; torque (Nm).....:		N
	No sharp point or edges		N
	Impact tests:		N
	- fragile parts; energy (Nm).....:		N
	- other parts; energy (Nm).....:		N
	1) live parts		N

EN 62560			
Clause	Requirement – Test	Result - Remark	Verdict

	2) linings		N
	3) protection		N
	4) covers		N
	Straight test finger		N

10	CAP TEMPERATURE RISE		P
	The cap temperature rise Δt_s of the lamp shall not exceed 120 K.		P
	- B22d 125K :		N
	- B15d 120K :		N
	- E27 120K :	75.5	P
	- Cap 125 K :		N
	- E14 125 K :		N
	-GU10.....100 K		N

11	RESISTANCE TO HEAT		P
	External parts of insulating material providing protection against electric shock, and parts of insulating material retaining live parts in position, ball pressure test:		P
	Part tested; temperature (°C); diameter of impression (≤ 2 mm):	See appended table	P
	Part tested; temperature (°C); diameter of impression (≤ 2 mm):		N
	Part tested; temperature (°C); diameter of impression (≤ 2 mm):		N

12.	RESISTANCE TO FLAME AND IGNITION		P
	Parts of insulating material retaining live parts in position and external parts of insulating material providing protection against electric shock, glow-wire test 650 °C		P
	- no flaming drops igniting tissue paper		P
	- flame extinguished within 30 s		P
	Part tested; temperature (°C).....:	See table 11	P

EN 62560			
Clause	Requirement – Test	Result - Remark	Verdict
	No visible flame and no sustained glowing		P

13	FAULT CONDITIONS		P
13.2	Extreme electrical conditions (dimmable lamps)		P
	Lamp withstands overpower condition >15 min.		N
	Lamp fails safe after 15 min overpower condition		P
	Lamp with automatic protective device or power limiter, test performed 15 min. at limit.		P
13.3	Extreme electrical conditions (non-dimmable lamps)		P
	Tested according 13.2 (as far as possible)		P
13.4	Short-circuit across capacitors	(see appended table)	P
13.5	Fault conditions: where diagram indicates fault condition impairs safety, electronic components have been short-circuited or disconnected	(see appended table)	P
13.6	When operated under fault conditions the lamp		P
	- does not emit flames or molten material		P
	- does not produce flammable gases or smoke		P
	- live parts not accessible		P
	After the tests the insulation resistance with d.c. 1000 V complies with requirements of Cl. 8.1		P

14 (16)	CREEPAGE DISTANCES AND CLEARANCES		P
	Creep age distances and clearances according to Table 3 and 4 of IEC 61347-1, as appropriate		P
	Printed boards see clause 14 of IEC 61347-1		P
	Insulating lining of metallic enclosures		N

TABLE		List of critical components and materials		
Component	manufacturers / trademark	Type / model	Value / rating	Approval/ Reference
PCB	Shikibo Electronics Co Ltd	E4	V-0, 130°C	UL
Insulating tape	YAHUA ADHESIVE TAPE CO LTD	Cat. No. PZ,	600V, 130°C	UL
Internal wire	--	1007	VW-1, 300V, 80°C, 22AWG	UL
Plastic enclosure	CHENGUANG RESEARCH INSTITUTE OF CHEMICAL IND CHINA NATL BLUE STAR CO LTD	PCV0	V-0, 130°C	UL

Test Data table

13	TABLE: tests of fault conditions		
Part	Simulated fault	Result	Hazard
C1	265V ,Short circuit	Fusing resistor open	NO
D4	265V ,Short circuit	No visible defects and recoverable	NO
D8	265V ,Short circuit	No visible defects and recoverable	NO
R18	265V ,Short circuit	No visible defects and recoverable	NO
T1 Output	265V ,Short circuit	No visible defects and recoverable	NO

11	TABLE: ball pressure test of thermoplastics			P
Part	Test temperature (°C)	Impression diameter (mm)	Required impression diameter (mm)	
PCB	125	0.8	≤2.0	
Lamp cover	75	1.5	≤2.0	

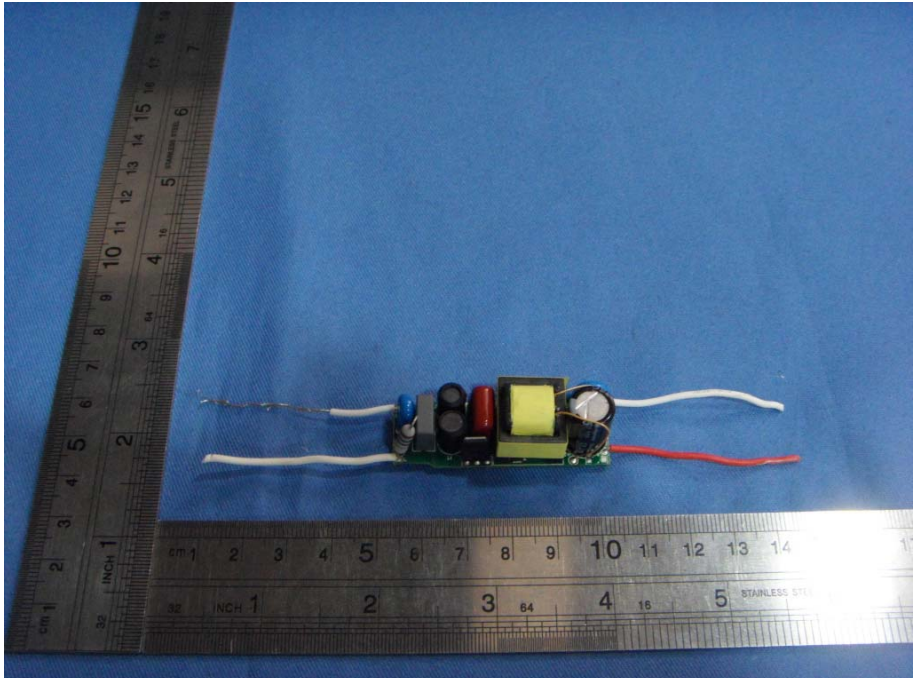
14(16)	TABLE: Clearance And Creep age Distance Measurements					P
clearance cl and creep age distance decry at/of:	Up (V)	U rams. (V)	Required cl (mm)	cl (mm)	required decry (mm)	decry (mm)
L and N on PCB	--	265	1.5	2.5	2.5	2.5
Different polarity of fuse	--	265	1.5	2.5	2.5	2.5
Live parts on driver PCB and accessible part	--	265	3.0	>3.0	3.0	>3.0
Primary circuit and secondary circuit of LED driver PCB	--	265	3.0	>3.0	3.0	>3.0
Primary winding of transformer and secondary circuit of LED driver	--	265	3.0	>3.0	3.0	>3.0
Core of transformer and secondary winding of LED driver	--	265	3.0	>3.0	3.0	>3.0

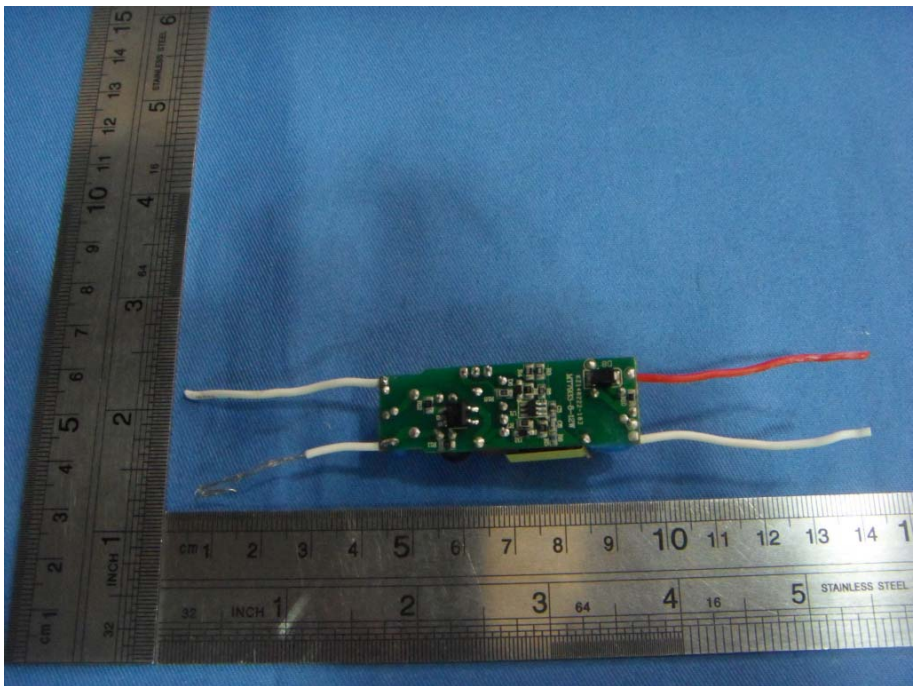
Supplementary information:

Attachment –A
Photo Documentation

<p>Photo 1</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> Internal</p>	
--	---

<p>Photo 2</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> LED</p>	
---	--

<p>Photo 3</p> <p>View:</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input checked="" type="checkbox"/> Internal</p>	 <p>A photograph showing the internal components of a small electronic device. The components are laid out on a blue surface next to a stainless steel ruler for scale. The components include a green printed circuit board (PCB) with various electronic components such as resistors, capacitors, and a yellow component. Two white wires and one red wire are connected to the board. The ruler shows measurements in both centimeters and inches.</p>
--	---

<p>Photo 4</p> <p>View:</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input checked="" type="checkbox"/> Internal</p>	 <p>A photograph showing the internal components of a small electronic device, similar to Photo 3. The components are laid out on a blue surface next to a stainless steel ruler for scale. The components include a green printed circuit board (PCB) with various electronic components such as resistors, capacitors, and a yellow component. Two white wires and one red wire are connected to the board. The ruler shows measurements in both centimeters and inches.</p>
--	--

END.